



INTERCOM SYSTEMS PRODUCT GUIDE

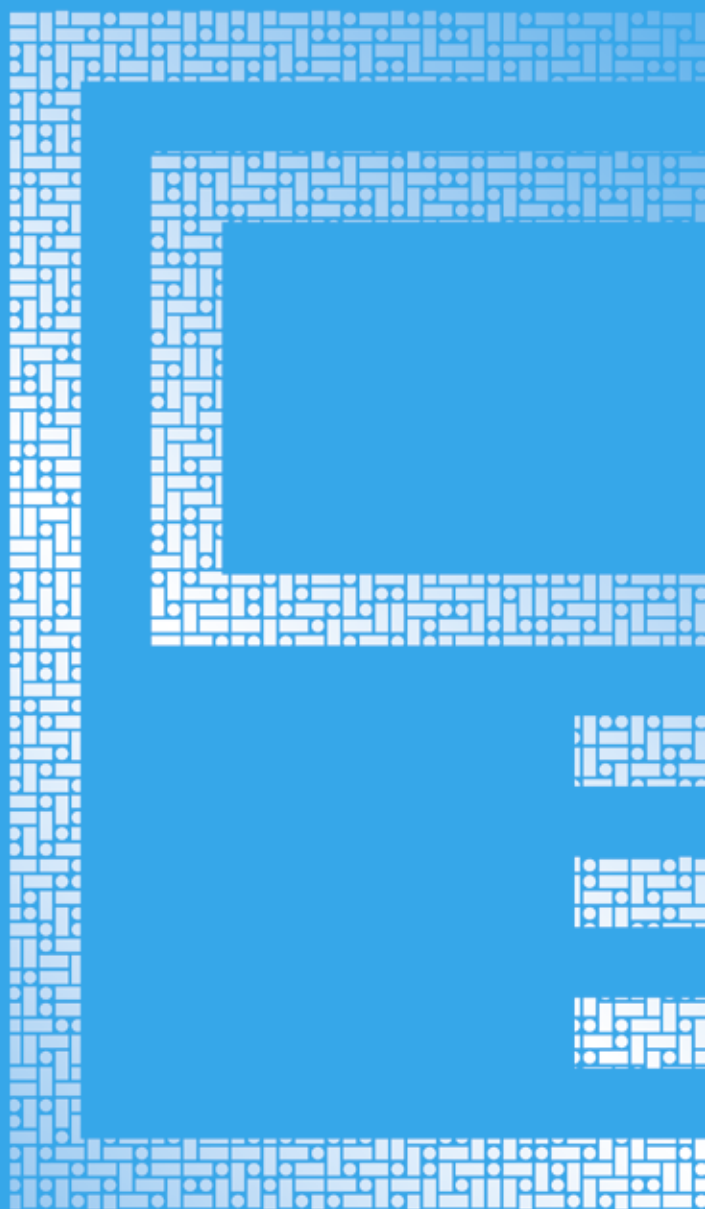

CAME 
MORE THAN TECHNOLOGY

MARCH 2024

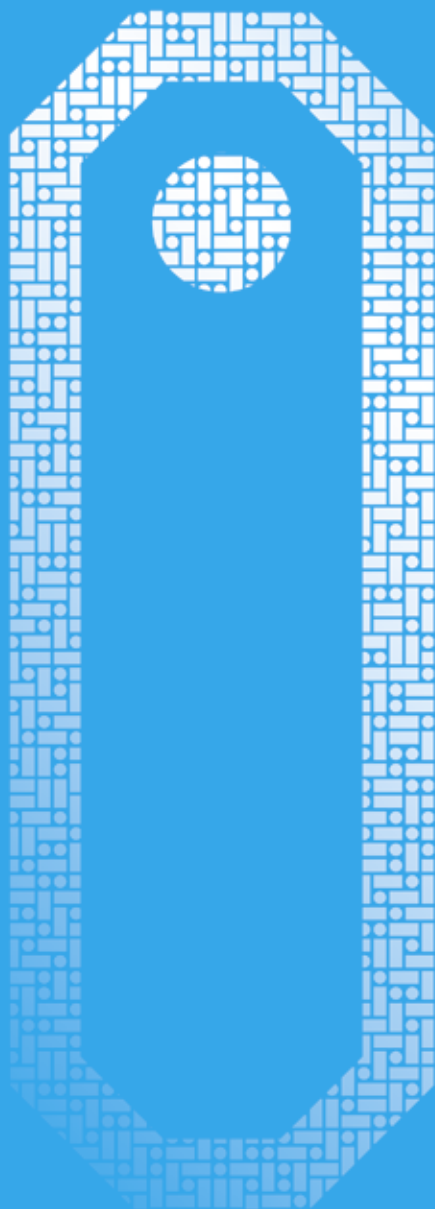

CONTENTS

04 System 200



05 4G LTE System



06 X1System



07 XIP System



08 IP360 System



10 App Connectivity
& Remote System
Management



12 IP Integration



13 Porter Software



16 MTM



18 MTM VR



20 VRW



22 VRM



24 VRC Bespoke



26 LHS



28 XVP




31 Mounting Posts




38 XTS



42 PLX



46 AGT



48 Entry Panels - Product Guide



49 Audio & Video Receivers
- Product Guide

THE PROFESSIONAL INSTALLERS CHOICE



HIGH QUALITY COMPONENTS

Premium products crafted in Italy with over 50 years industry experience



NEXT DAY DELIVERY

Fixed shipping costs



LARGE UK STOCK AVAILABILITY

1000s of products held in stock across our network



DEDICATED SALES & TECHNICAL SUPPORT TEAM

Industry leading network of sales & technical support at the touch of a button



INDUSTRY LEADING BESPOKE PANEL PRODUCTION

Unbeatable lead times & fast turnaround on UK manufactured bespoke panels



FIRST CLASS TRAINING FACILITIES

Fully interactive demonstration suites with dedicated hands on training areas



3 YEAR WARRANTY

We offer a 3 year warranty on all CAME electrical components and a 1 year warranty on all CAME mechanical components

SYSTEM 200

THE MULTI-WIRED AUDIO SYSTEM IS SUITABLE FOR THOSE LOOKING TO COST SAVE

200



Multi-Wire

100

calls

10

external audio
stations

250 m

between
external station
and last receiver

6

intercom calls

Low
Volume

System 200 is the most simple solution in our range, comprising of 3 common conductors and one conductor for each call.

Many devices are available that allow the expansion of the system, starting from the MTM door entry panel which, thanks to the modularity, allows an easy and personalised installation as well as being easy to maintain.


The system is equipped with the intercom function and it's possible to activate up to 3 internal extensions using the same call. This system is dedicated to audio applications where price is the key element.

FEATURES

- DC power supply (zero audio noise)
- Integrate a standard two wire doorbell
- System engaged indicator

KEY

- 2 Wires
- 8+N
- 3+N

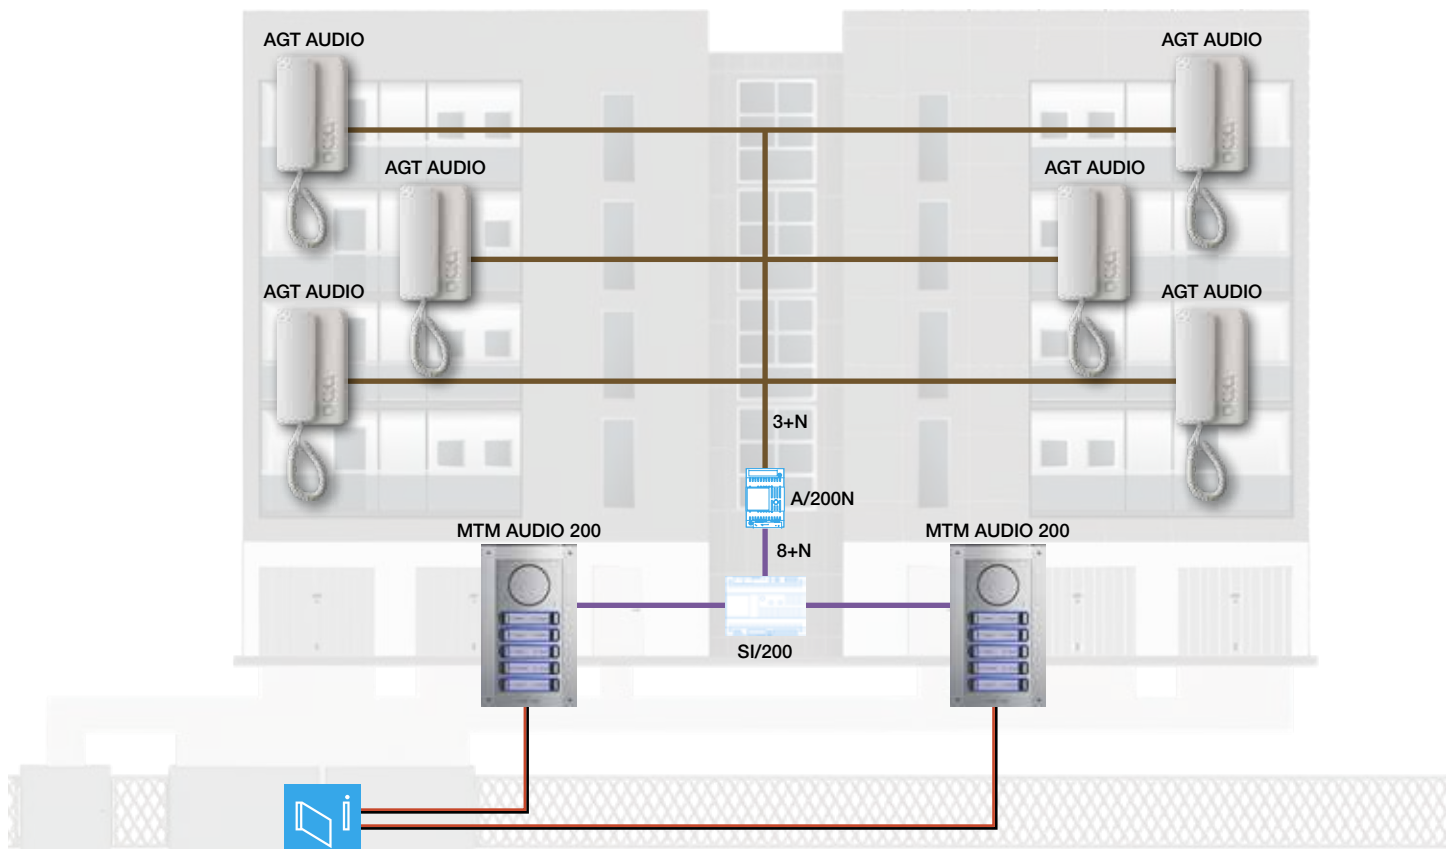

4G LTE SYSTEM



TAKE ADVANTAGE OF THE 4G NETWORK SYSTEM WITHOUT LIMITATIONS

- 5** Auto Dialed numbers per button
- 3000** Users, phone numbers, or keypad codes
- Remote** Key code programming
- 2** Output relays
- Time based** call forwarding
- Dial to open** opening with telephone ring

FEATURES

- Configure and manage via CONNECT SetUp app
- Dial up to 3000 telephone numbers
- Can be powered by a CAME control board
- Dial to open
- Two output relays
- Voice mail avoidance setting
- Compatible with CAME Key


The 4G system is designed to be used in scenarios where it is not possible to install a traditional door entry system. It operates through the mobile telephone network in situations where there is a large distance between the entrance and the building, or when the external unit must be able to call a fixed or mobile telephone.

The installation of the external unit is performed in “stand alone” mode, connecting it to a power supply and to the antenna for receiving the 4G signal.

A special feature of the system is the “dial to open” function which allows the opening of a gate with a simple telephone call.


SCENARIO 1

MTM A connects to the automation and is powered via an automation control panel.

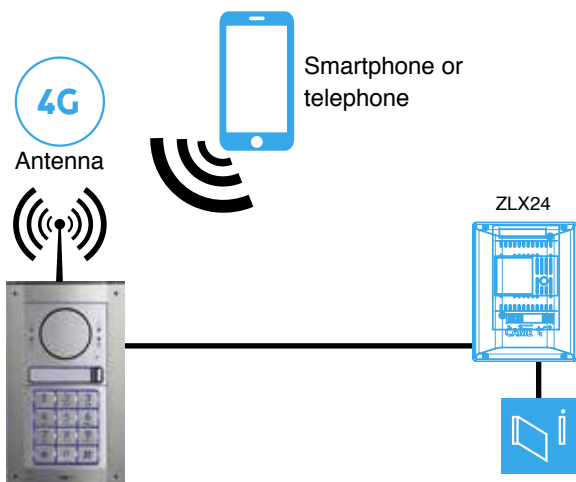

SCENARIO 2

MTM A is powered by a dedicated power supply.

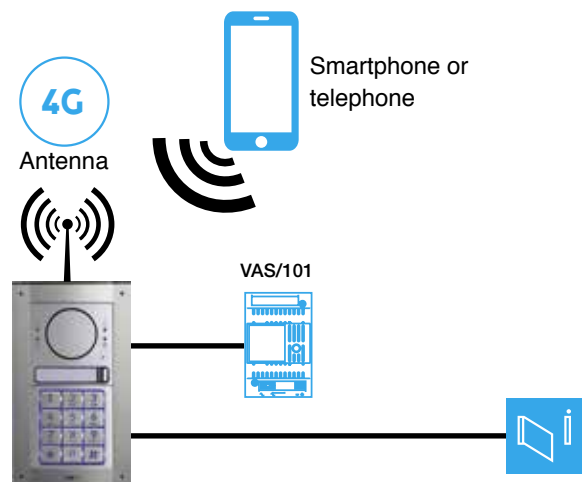

X1 SYSTEM

THE SIMPLE 2 WIRE SYSTEM WITH MANY ADVANTAGES



100 Apartments	3 Entry panels	650 m Between external station and last receiver	8 CCTV cameras	500 Access control codes	4 App Connections per apartment (with XTS monitor)
--------------------------	--------------------------	--	--------------------------	------------------------------------	--


X1 is the ideal system for single houses or apartment blocks of up to 100 dwellings. The simple two wire (non-polarised) structure makes X1 ideal for replacing old systems using existing cables or new installations that do not require an integrated IP network solution. The system can be programmed manually or via powerful PC software to allow integration of CCTV cameras, porter switchboards and mobile device apps (when using the XTS 7 inch monitor).

FEATURES

- 2 non-polarised twisted wires
- Direct integration with CCTV
- Intercom function for up to 10 receivers
- Programmable manually or by PC
- Self-learning function
- Smartphone management of calls
- Up to 2 porter switchboards

KEY

- 2 Wires
- VCM/1D (or equivalent)
- VCM/2D (or equivalent)
- COAX

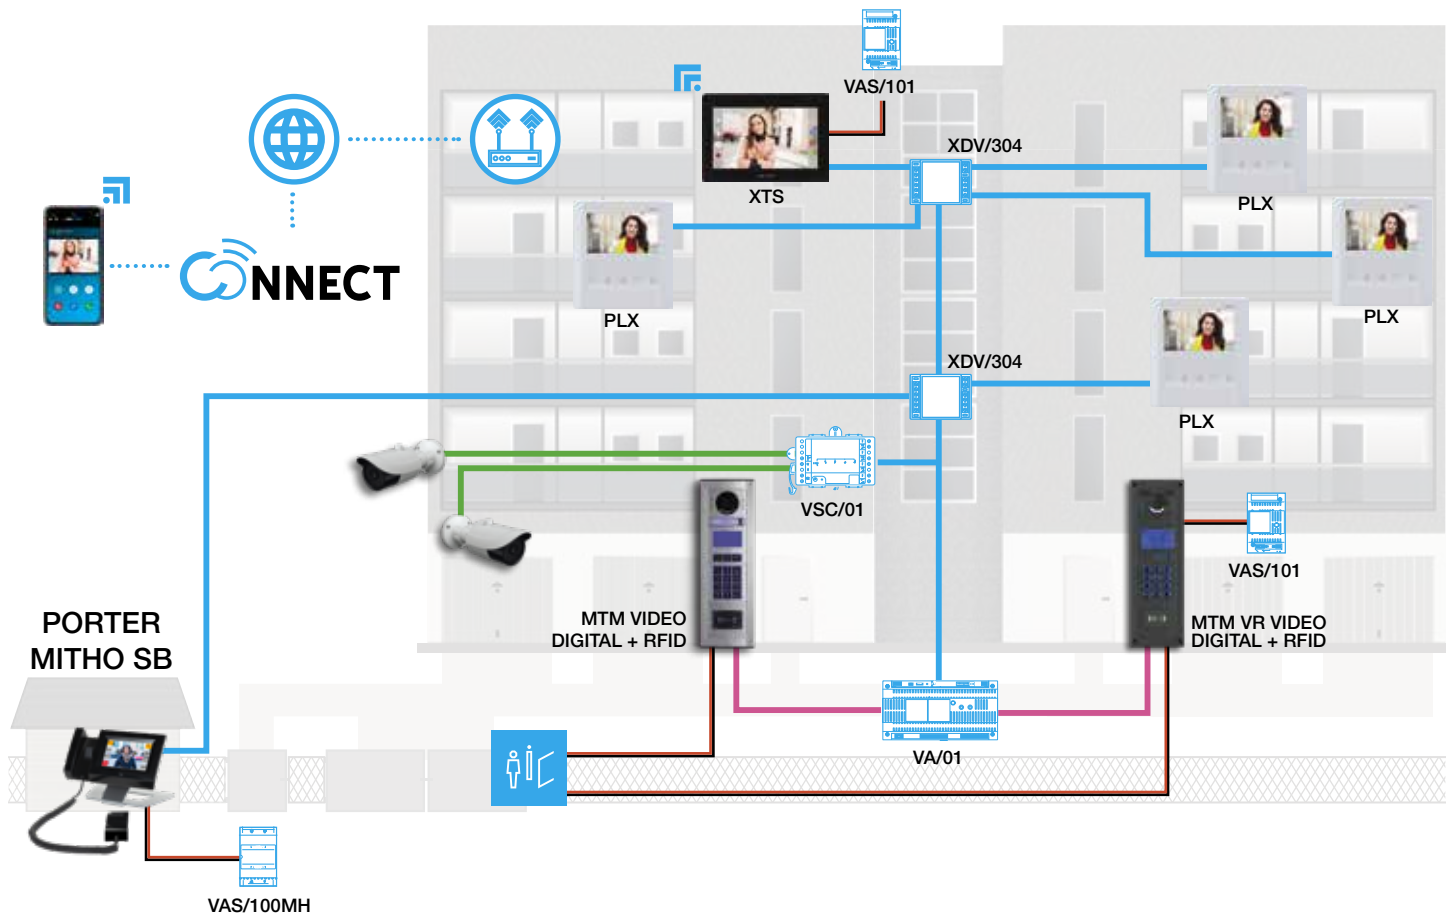

XIP SYSTEM



THE HYBRID SYSTEM THAT COMBINES THE EXPANDABILITY OF IP TECHNOLOGY WITH THE SIMPLICITY OF THE X1 SYSTEM

Unlimited
Calls

Unlimited
Entry Panels

800 m
between external video station and power supply

750 m
between power supply and last receiver

50.000
access control codes

Unlimited
App connections per system
(Per apartment limit applies)


FEATURES

- Hybrid cabling
- Intercom function for up to 10 receivers
- PC programmable
- Self-learning function
- Programmable call forwarding
- Integration with CCTV
- Smartphone management of calls

XiP is a unique hybrid system combining the simplicity of a two wire system, and the flexibility of connection to an IP LAN, for a truly scalable solution. Within a block, conventional wiring can connect to a LAN via a converter accessing the most versatile and powerful PC based porter system available. Multiple sites can be managed over a network from a remote central point, whilst multiple Porter stations can work together across large developments. Add to this the extensive use of mobile apps via the CAME cloud and the XiP system stands alone in versatility and capability.

KEY

- 2 Wires
- VCM/1D (or equivalent)
- VCM/4D (or equivalent)
- UTP CAT 5
- Flat Cable

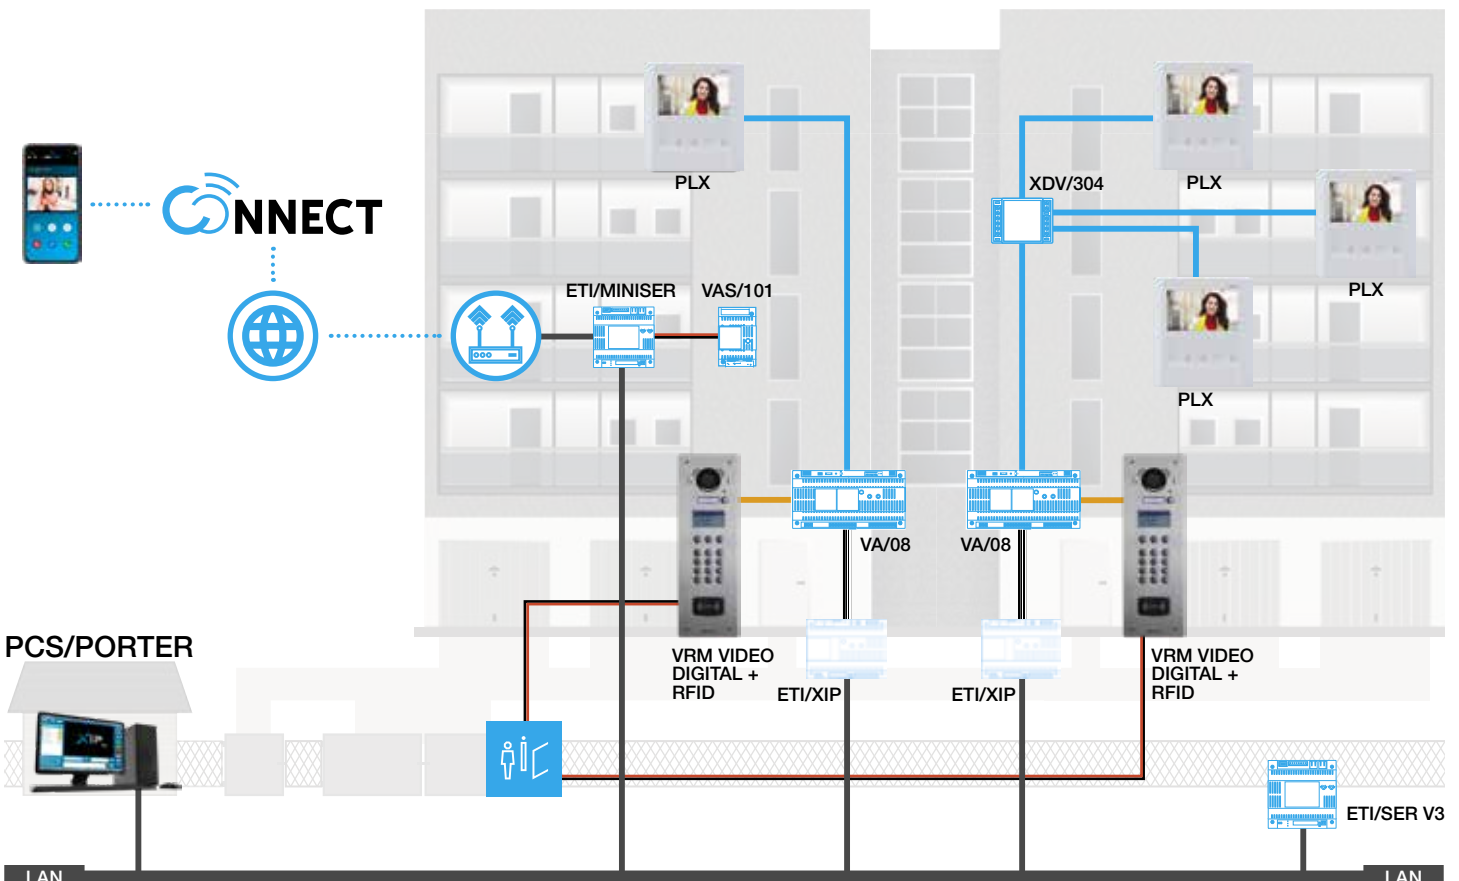

IP360 SYSTEM

INFINITE POTENTIAL FROM THE IP SYSTEM

IP360

Unlimited

Calls and distances

Unlimited

Entry Panels

Scalable

From single entry to multi block

SIP

integration with third parties

50.000

Access control codes

Unlimited

App connections per system
(Per apartment limit applies)

IP360 takes advantage of an Ethernet connection between all devices, offering advanced video door entry services in line with modern residential, urban or business requirements. The biggest advantage of the system is scalability. The system provides a solution without a server for small residential installations as well as a multi-server option for large urban complexes. It is equipped with advanced functions such as the Porter switchboard on the PC, call forwarding, access control and integration to VoIP telephone exchanges.

The system allows multi-site management via a single control room exploiting the potential of the LAN. Finally, your customers will be able to manage audio / video calls and execute any commands via the app directly on their smartphone or tablet.

FEATURES

Ethernet cabling, even on existing LAN networks

PC programmable with web configuration

Advanced management of access control: time slots, permits

Programmable call forwarding

Integration with IP CCTV

Integration with SIP terminals (e.g. Crestron)

Unlimited calls simultaneously

Smartphone management of calls


KEY

— 2 Wires

— UTP CAT 5


SERVERLESS

The IP360 system can function without the need for a server, thus reducing the cost of the overall system. This makes it an attractive proposition for any installation. The IP360 external panel is supplied with 4 licences as standard allowing you to receive calls from the entry panel and from your smart phone and tablet via a dedicated app.

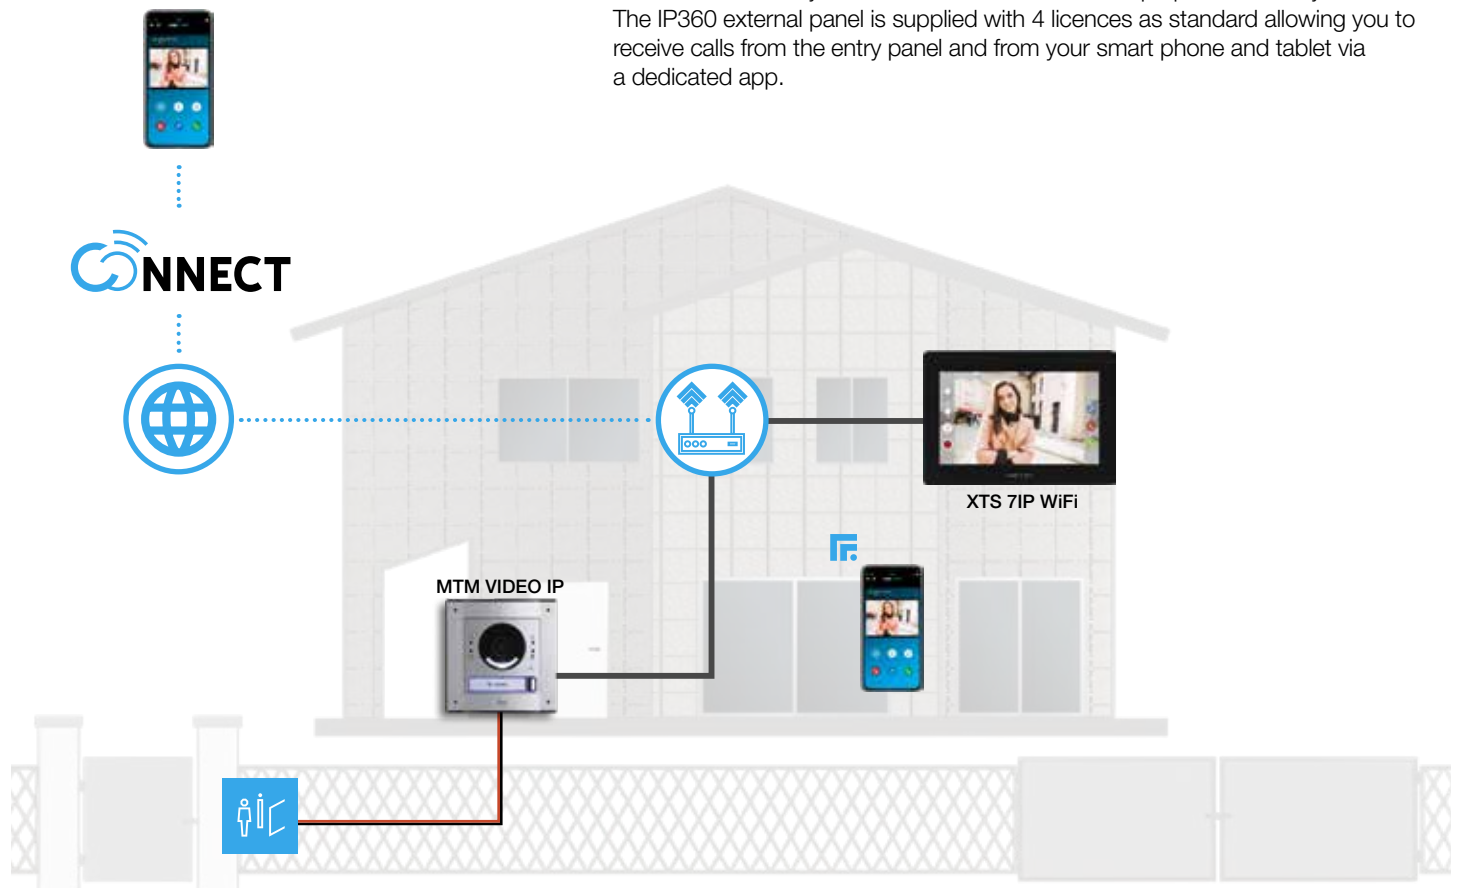

KEY

- 2 Wires
- UTP CAT 5

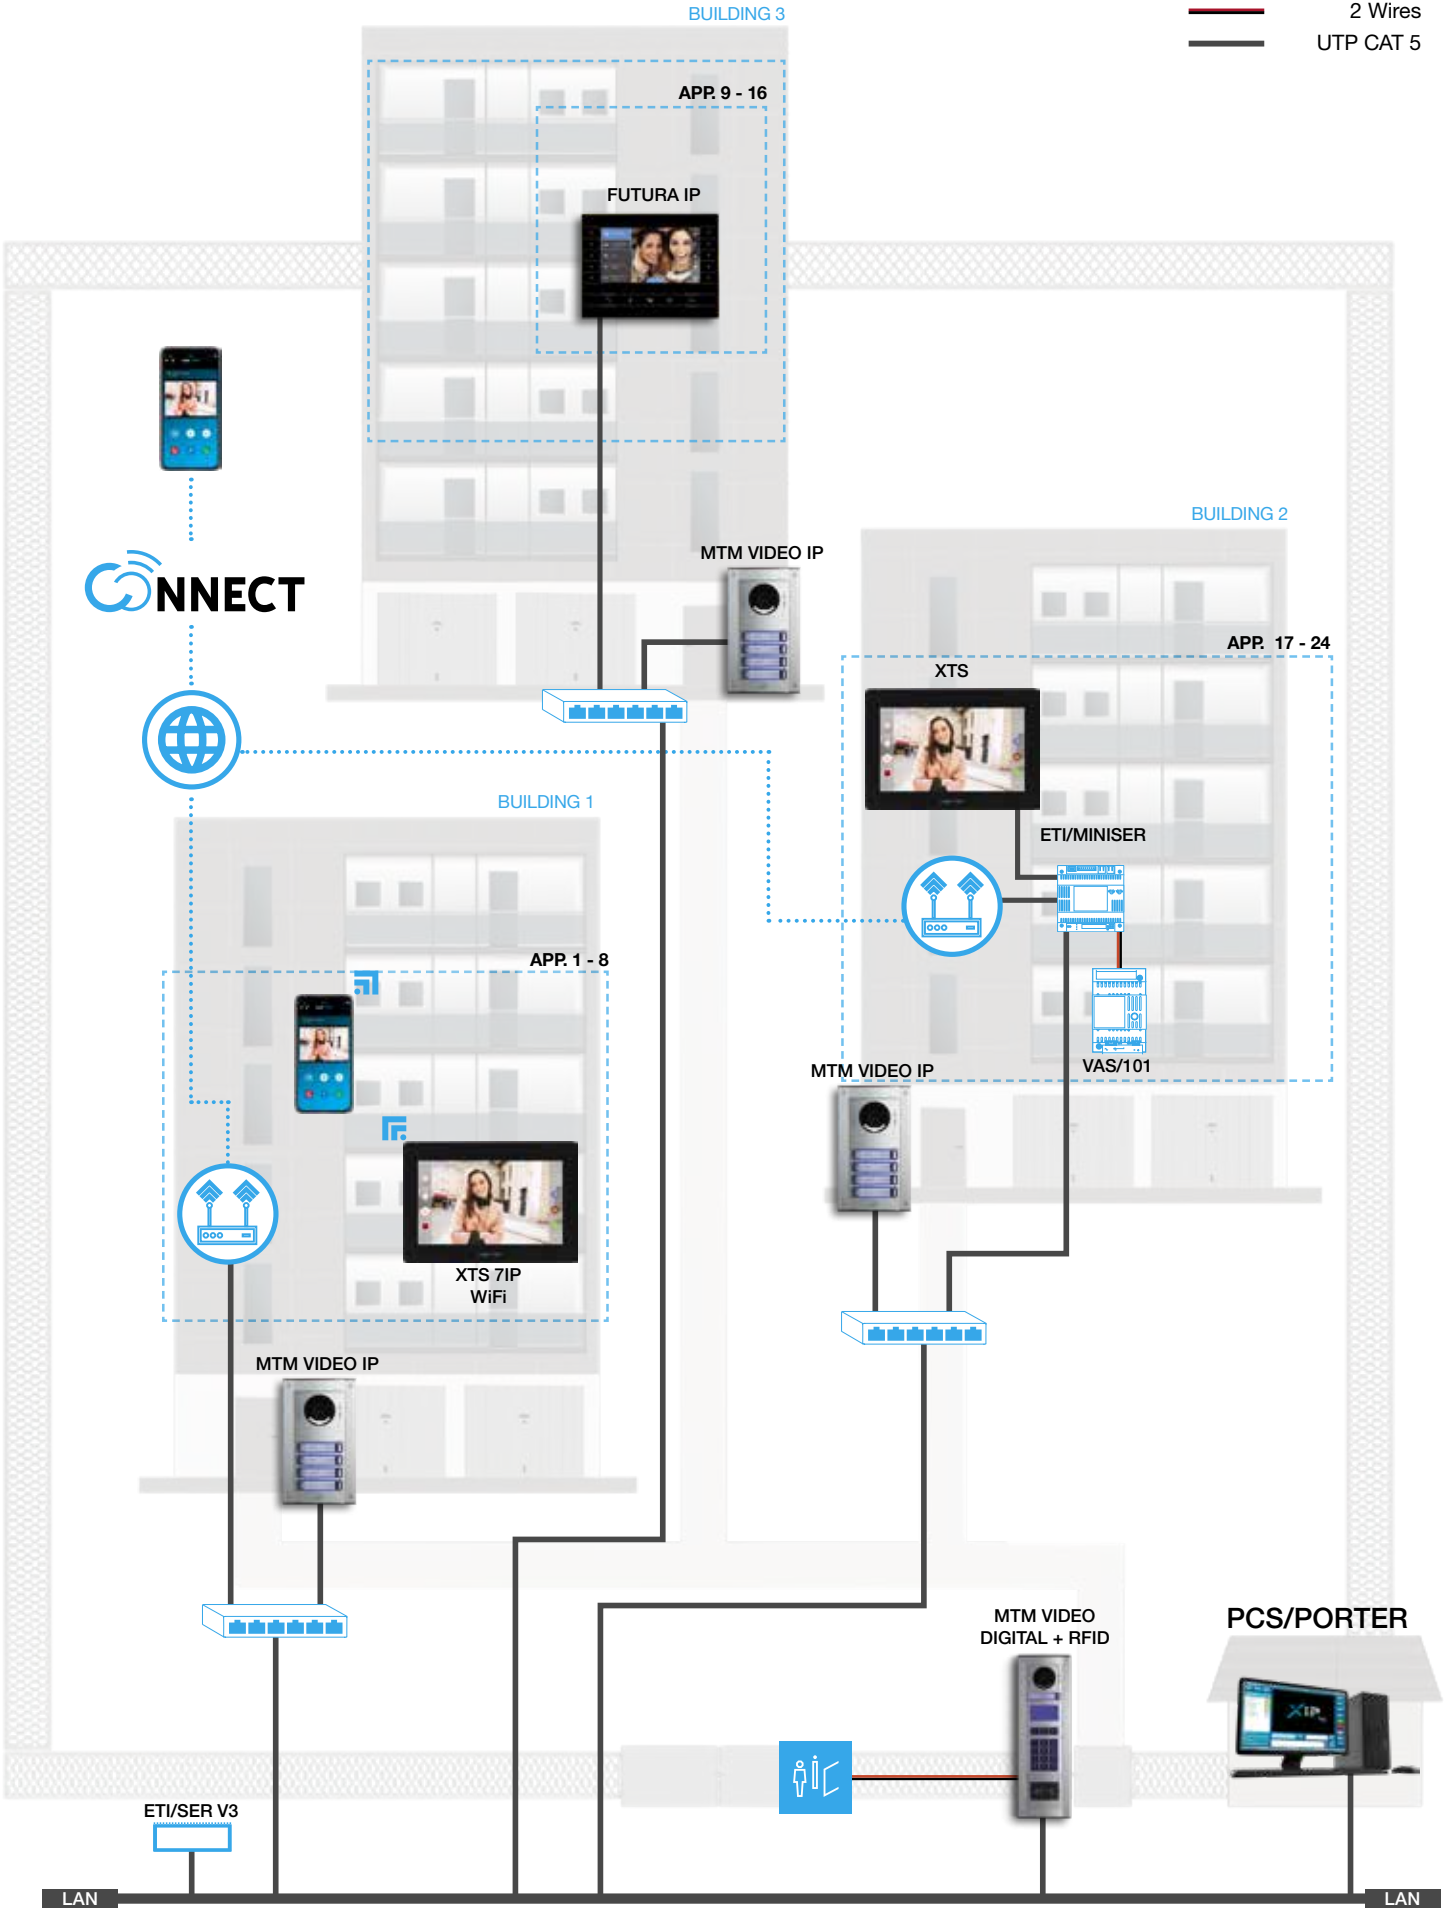

APP CONNECTIVITY & REMOTE

MANAGE YOUR CAME PRODUCTS USING THE APP AND CAME CONNECT




The CAME VideoEntry App lets you manage calls from your audio/video entry system, directly on your smartphone or tablet.

Do you want to see who is ringing the doorbell, even when you're not home?

The VideoEntry App lets you get calls and remotely view the entry panel area on you mobile device. Just connect the system to your home router.

Answering, checking the video camera live images and opening the front door, via your smartphone is now possible.

STANDARD INSTALLATION

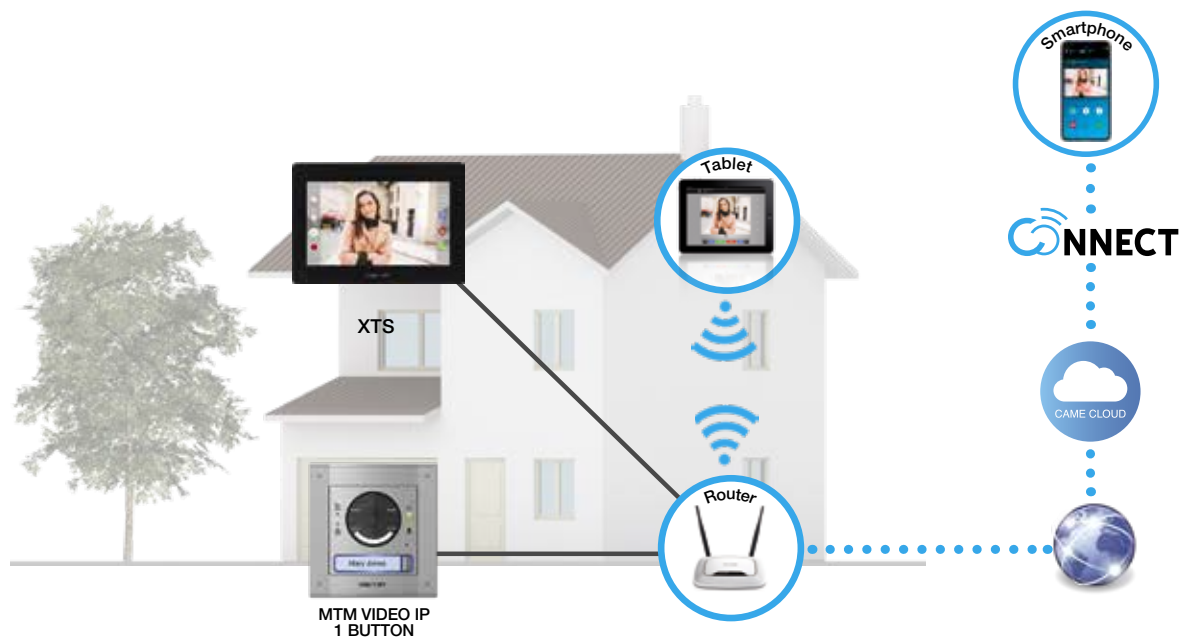

KEY

- = UTP CAT 5
- = Internet connection required
- WiFi = WiFi

SYSTEM MANAGEMENT




RECEIVE CALLS FROM YOUR SMARTPHONE WHEN YOU ARE OUT

If a call from the entry panel is not answered on the monitor, calls can also be received and controlled via the CAME VideoEntry app anywhere in the world using the CAME cloud connection (WiFi or suitable 4G data connection required).



OPEN YOUR FRONT DOOR



SWITCH ON THE LIGHTS



VIEW YOUR CAMERAS



CALL YOUR HOUSE

This app, available free for both iOS and Android devices, allows you to manage calls from external units directly from smartphones and tablets.

DOWNLOAD AVAILABLE ON:



IP INTEGRATION

SEAMLESS INTEGRATION WITH IP360 FROM CAME



CAME have lead the way for over a decade in integration with high end AV installations. The latest innovations offered by the IP360 system make CAME an even more flexible solution.

FEATURES

- Single or multi network architecture as required
- Standard LAN platform
- Central switchboard management system
- Direct IP connection
- Easy to install

Crestron and CAME R&D departments have worked together to create a system with full interoperability between the CAME IP360 video door entry system and Crestron home control. Without the requirement for any additional specialist units, the two systems can work in complete harmony.

Entry control can be accessed seamlessly with Crestron touchscreen panels and remote devices, and release the full functionality of the IP360 system, such as the IP porter facilities, by using a shared network.

Full SIP connectivity provides the flexibility to integrate audio from the entry system into many leading VOIP telephony systems and control entry via the users existing phone terminal.



PORTER SOFTWARE

SWITCHBOARD SOFTWARE



This software is compatible with all PCs with a Windows operating system, allowing total system supervision, even for large residential complexes. In the main screen the system devices are displayed with the respective coloured icon that identifies the status (free, busy, etc.). The menu is divided into 3 parts:

- Plant: list that includes all the devices in the system
- Favorites: list of the most frequently called devices
- Entry panels and cameras: structure with all the entry panels and cameras in the system.

FEATURES

- Unlimited Porter switchboard capability
- Touchscreen compatible
- Dual conversation
- AUX2 or second door call
- Interception of calls according to time profiles
- Rerouting of calls under certain conditions
- Staircase lighting activation (direct or programmed)
- Door release activation (direct or programmed)
- Entry panels and / or cameras activation
- Answer to incoming calls
- End the active call
- Transfer of the image coming from the external unit
- Transferring the active call to another user
- Multiple porters with intelligent incoming call routing

INCOMING CALL EXAMPLE



When a call is received, the image from the entry panel is displayed in full-screen mode on the porter's monitor; the image of the porter is shown in PIP (picture-in-picture) mode. If the call is transferred from the entry panel to a receiver, the external video image will be shown (with the porter in PIP mode) on the receiver.

SIMULTANEOUS CALLS EXAMPLE

If a second call is received while a call is in progress, the images will be displayed as shown in the diagram. One of the two calls can be placed on hold at the touch of a fingertip.



ENTRY PANELS

MTM

OUR RANGE OF EXTERNAL
MODULAR ENTRY PANELS

MTM VR

MODULAR EXTERNAL ENTRY PANELS
WITH AN ANTI-VANDAL FINISH

VRM

EXTERNAL VANDAL RESISTANT
MODULAR ENTRY PANELS
MANUFACTURED IN THE UK
FROM 316 STAINLESS STEEL

LHS

VANDAL RESISTANT RESIDENTIAL
ENTRY PANELS

XVP

EXCLUSIVE HIGH END EXTERNAL
7" TOUCH SCREEN ENTRY PANEL
COMBINING CUTTING EDGE
TECHNOLOGY WITH ITALIAN STYLE



MTM

THE RANGE OF EXTERNAL MODULAR ENTRY PANELS










COMPATIBLE SYSTEMS




MTM has an extensive range of modular configurations, that are compatible with five different systems, allowing multiple functions to be carried out.

It's clean design has strong aesthetic appeal in all installation scenarios, while maintaining simple functionality.


Particular attention to detail has been paid to the finish, by eliminating the speaker holes, backlighting the keypad to give it a sleek look, and using satin aluminium for durability.

- | | | | |
|---|--|---|--|
|  | Flush mount installation
Thickness 13 mm |  | Surface mount installation
Thickness 64 mm |
|  | Audio only version |  | Video version |
|  | Water and dust protection rating
IP54 |  | Impact resistance rating
IK07 |
|  | Induction loop version available by request | | |

VIEWING ANGLE

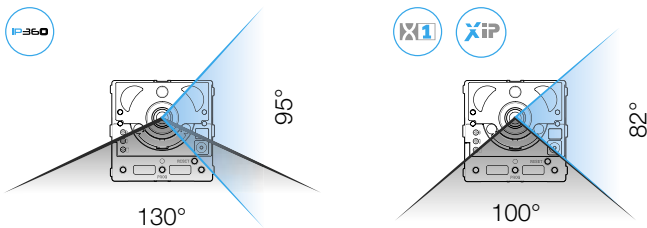

DIMENSIONS

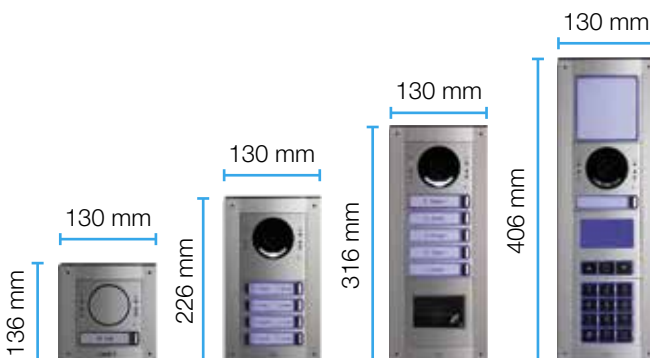

FEATURES

- Anodised and frosted natural aluminum finish
- Unique design without typical speaker holes
- Direct connection of an analogue camera (audio X1)
- High efficiency illuminator with anti-dazzle diffuser
- Acoustic and visual signals
- HD resolution (IP Camera version only) and HDR technology (High Dynamic Range)
- Backlighting of blue or white label holders with intensity adjustment
- Front mini USB for firmware updates and programming
- Up to 98 call buttons and unlimited digital calls



DIGITAL COMPOSITION

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users, a scrolling list or an alphabetical block search.



PUSH-BUTTON COMPOSITIONS

On the call module, you can customise the amount of buttons required. Using a variety of modular front plates you can achieve maximum button composition flexibility. Available with 2, 3, 4 and 8 button front plates.





ACCESS CONTROL

The MTM range also includes 2 modules dedicated to access control, one with a keypad and one with an RFID reader. Both modules are equipped with 2 on-board relays and 2 inputs for direct relay activation.


RECESS MOUNTING BOX

Available for the various versions of external unit, from 1 to 4 modules, depth of 48 mm.

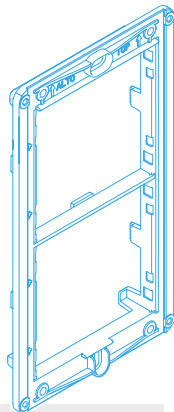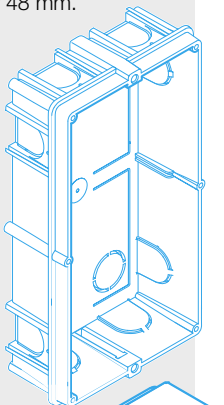


FRAME

Aluminium module frame with cathodolysis finish and black paint to ensure high resistance to corrosion and rust. Compatible with the built-in boxes of BTicino, Comelit and Urmet.

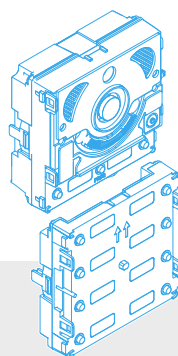


ELECTRONIC MODULES

Snap-in installation without the use of screws. Simple and error-free wiring between modules thanks to polarized connectors.

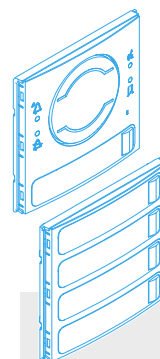

FRONT PLATE

Front panels ready to use, pre-configured without the need to manage additional buttons and plugs. External face is satinised aluminium solid structure rated to IK07 resistance. A VR version is also available in a Zamak finish rated IK09.

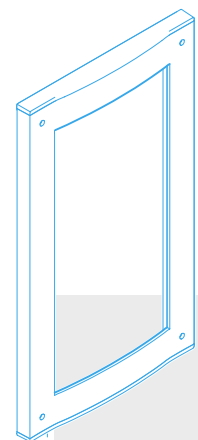

EXTERNAL FRAME

Closing frame with a clean line, entirely in satin aluminium.

INSTALLING MTM IS FAST AND EASY

There are 5 components that make up the external unit: the wall or recessed box, the frame, the electronic module, the front plate and the external frame.

RAIN HOOD

Wall box available in cases where recessed installation is not possible.

MTM VR








MODULAR EXTERNAL UNIT WITH AN ANTI-VANDAL FINISH




COMPATIBLE SYSTEMS




A key feature of MTM VR is the durability and strength of the materials. The modular entry panel does not go unnoticed. It uses the same electronic modules and easy to fit functionality as the standard MTM however, it uses an IK09 rated vandal resistant Zamak composite with crush proof buttons and anti-tamper screws.

- | | | | |
|---|--|---|--|
|  | Flush mount installation
Thickness 16 mm |  | Surface mount installation
Thickness 64 mm |
|  | Audio only version |  | Video version |
|  | Water and dust protection rating
IP54 |  | Impact resistance rating
IK09 |
|  | Induction loop version available by request | | |

VIEWING ANGLE

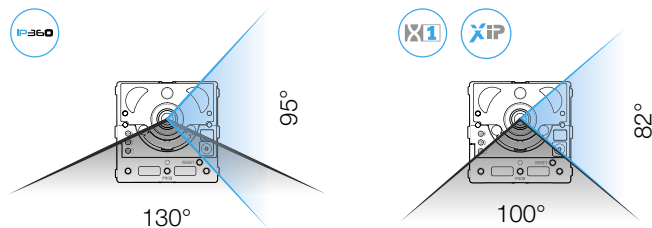

DIMENSIONS

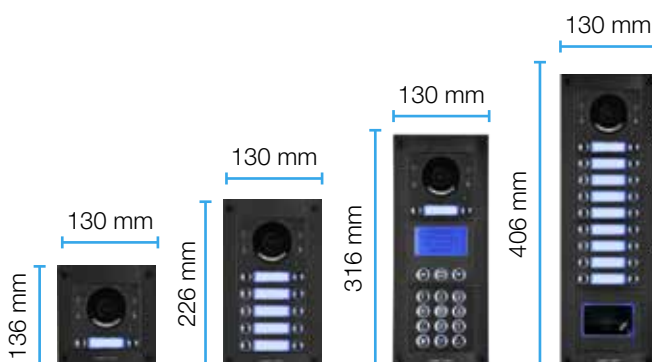

FEATURES

- Die cast Zamak metal composite construction
- Direct connection of an analogue camera (audio X1)
- High efficiency illuminator with anti-dazzle diffuser
- Acoustic and visual signals
- HD resolution (IP Camera version only) and HDR technology (High Dynamic Range)
- Backlighting of blue or white label holders with intensity adjustment
- Front mini USB for firmware update and programming
- Up to 98 call buttons and unlimited digital calls



DIGITAL COMPOSITION

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users: a scrolling list or an alphabetical block search.



PUSH-BUTTON COMPOSITIONS

On the call module, you can customise the amount of buttons required. Using a variety of modular front plates you can achieve maximum button composition flexibility. Available with 2, 3, 4 and 8 button front plates.



ACCESS CONTROL

The MTM VR range also includes 2 modules dedicated to access control, one with a keypad and one with an RFID reader. Both modules are equipped with 2 on-board relays and 2 inputs for direct relay activation.



IK09 - IMPACT RESISTANCE FOR GREATER SECURITY AND PEACE OF MIND

All of the functions of the standard MTM version are available in the vandal-resistant version. It uses the same mechanics, modular functionality, and accessories but with a vandal-resistant skin that includes crush proof buttons and custom screws.

Designed in Zamak composite, all VR items will resist up to IK09 impact levels. This means the MTM series is the most complete range of modular entry panels on the market offering you durability, without compromising the features and quality of a standard MTM.

VRW

MODULAR EXTERNAL UNIT WITH UK MANUFACTURED VANDAL RESISTANT FACIAS











COMPATIBLE SYSTEMS




A key feature of VRW is the durability and strength of the materials. It uses the same electronic modules and easy to fit functionality as the standard MTM however, it uses an IK09 rated vandal resistant marine grade stainless steel manufactured in the UK. Additionally, it uses IK09 rated buttons manufactured in Italy.


Vandal resistant entry panels are available in a number of finishes such as Stainless Steel, Highly Polished Steel, Brass and can be custom powder coated in any RAL colour of your choice.

- | | | | |
|---|--|---|--|
|  | Flush mount installation
Thickness 2 mm |  | Surface mount installation
Thickness 52 mm |
|  | Audio only version |  | Video version |
|  | Water and dust protection rating
IP65 |  | Impact resistance rating
IK09 |
|  | Induction loop version available by request |  | Marine grade 316 stainless steel |

VIEWING ANGLE

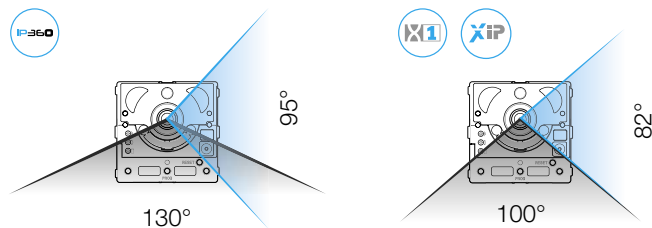

DIMENSIONS

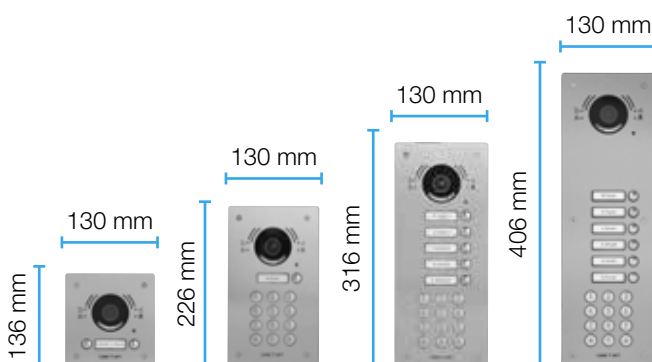

FEATURES (In addition to the benefits of the MTM VR)

Bespoke finishes

Laser engraving

Unmatched video quality


IP65 rated bespoke buttons


Manufactured in the UK

Impact & water resistant

Custom sizes

EXPLODED DIAGRAM OF COMPONENTS

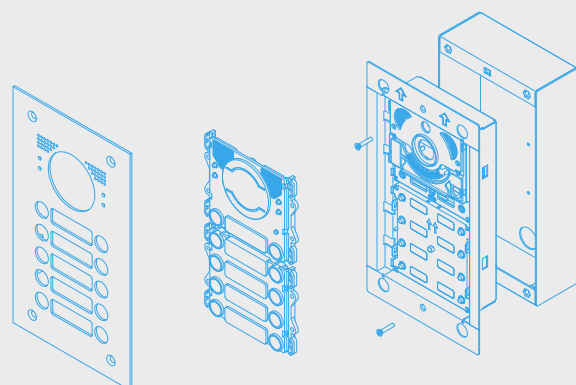

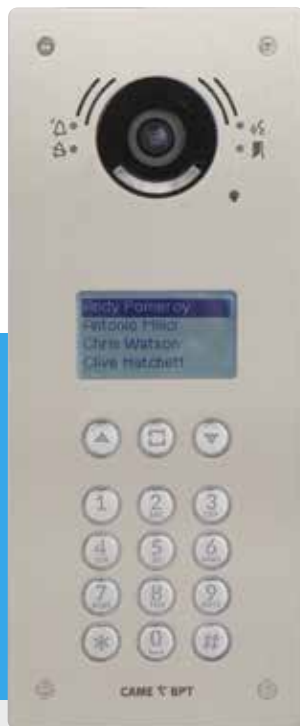

DIGITAL COMPOSITION

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users: a scrolling list or an alphabetical block search.



PUSH-BUTTON COMPOSITIONS

On the call module, you can customise the amount of modular buttons required. Using a variety of modular front plates you can achieve maximum button composition flexibility. Available with 2, 3, 4, 5 and 8 button front plates.



ACCESS CONTROL

The VRW range can accommodate the MTM VR keypad unit for standalone access control as well as the unique 'Universal reader bracket' able to house most types of common proximity access control reader.



VANDAL RESISTANT

The vandal resistant entry panel is constructed from marine grade 316 brushed stainless steel and manufactured in the UK to the highest standards. The IP65 rated crush proof buttons can be used in either video or audio panel styles with coded keypads, proximity reader cut outs or smash and scratch resistant windows which are constructed from Makralon.

Surface or flush mounted, they are the last word in hard wearing, durable entry panel design. As well as the standard range, custom sizes can also be manufactured to suit any application.

UNIVERSAL READER BRACKET

VRW confirms its versatility with the introduction of our new universal proximity reader bracket system. A simple, innovative component utilising precision engineering to deliver a product with a wealth of options for our customers. Manufactured to exacting standards, our versatile bracket allows you to use almost any proximity reader in the market.

Unique to our vandal resistant range, you can order your entry panels safe in the knowledge that VRW will accommodate it without the need for further components.

VRM

MODULAR EXTERNAL UNIT WITH UK MANUFACTURED VANDAL RESISTANT FACIAS











COMPATIBLE SYSTEMS




A key feature of VRM is the durability and strength of the materials. It uses the same electronic modules and easy to fit functionality as the standard MTM however, it uses an IK09 rated vandal resistant marine grade stainless steel manufactured in the UK.


Vandal resistant entry panels are available in a number of finishes such as Stainless Steel, Highly Polished Steel, Brass and can be custom powder coated in any RAL colour of your choice.

- | | | | |
|---|--|---|--|
|  | Flush mount installation
Thickness 2 mm |  | Surface mount installation
Thickness 52 mm |
|  | Audio only version |  | Video version |
|  | Water and dust protection rating
IP65 |  | Impact resistance rating
IK09 |
|  | Induction loop version available by request |  | Marine grade 316 stainless steel |

VIEWING ANGLE

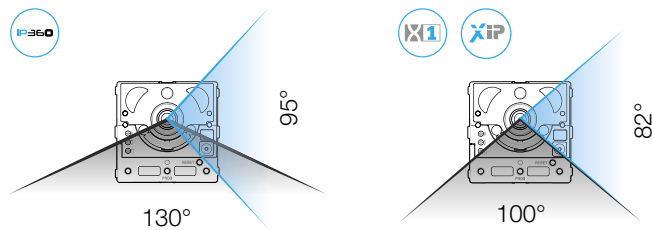

DIMENSIONS

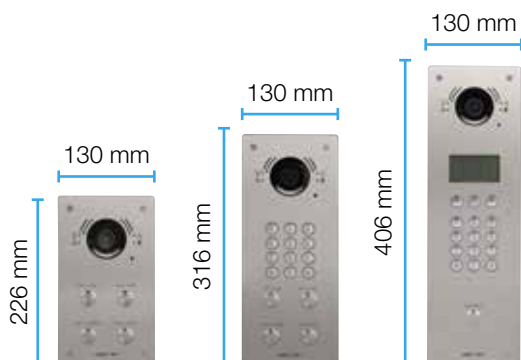

FEATURES (In addition to the benefits of the MTM VR)

Bespoke finishes

Laser engraving

Unmatched video quality


IP65 rated bespoke buttons


Manufactured in the UK

Impact & water resistant

Custom sizes


EXPLODED DIAGRAM OF COMPONENTS

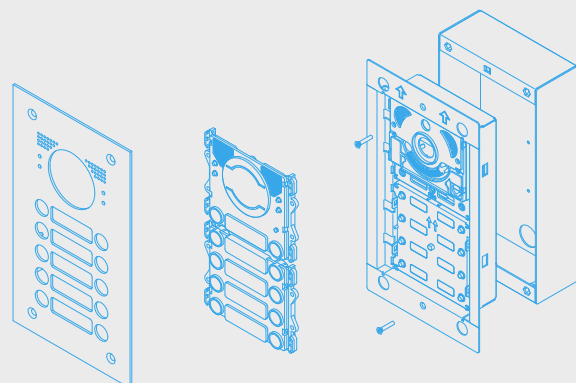

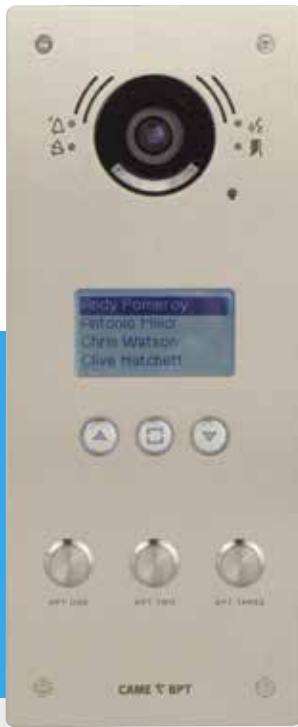

DIGITAL COMPOSITION

The digital display allows a phone book with up to 7200 names to be displayed. During the programming phase you can choose the most appropriate search mode based on the number of users: a scrolling list or an alphabetical block search.

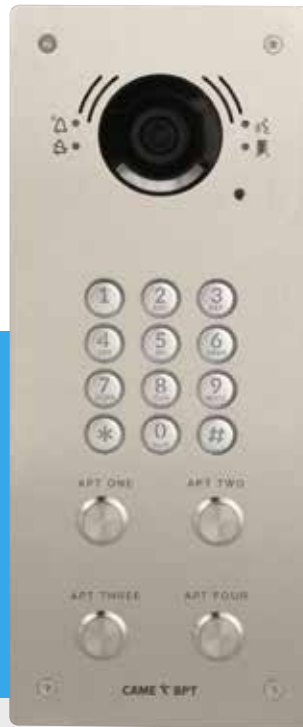

PUSH-BUTTON COMPOSITIONS

On the call module, you can customise the amount of buttons required. Using UK manufactured push buttons, you can achieve maximum button composition flexibility.



ACCESS CONTROL

The VRM range can accommodate the MTM VR keypad unit for standalone access control as well as the unique 'Universal reader bracket' able to house most types of common proximity access control reader.



VANDAL RESISTANT

The vandal resistant entry panel is constructed from marine grade 316 brushed stainless steel and manufactured in the UK to the highest standards. The IP65 rated crush proof buttons can be used in either video or audio panel styles with coded keypads, proximity reader cut outs or smash and scratch resistant windows which are constructed from Makralon.

Surface or flush mounted, they are the last word in hard wearing, durable entry panel design. As well as the standard range, custom sizes can also be manufactured to suit any application.

UNIVERSAL READER BRACKET

VRM confirms its versatility with the introduction of our new universal proximity reader bracket system. A simple, innovative component utilising precision engineering to deliver a product with a wealth of options for our customers. Manufactured to exacting standards, our versatile bracket allows you to use almost any proximity reader in the market.

Unique to our vandal resistant range, you can order your entry panels safe in the knowledge that VRM will accommodate it without the need for further components.

VRC BESPOKE

CUSTOM MADE MODULAR EXTERNAL UNIT WITH FULL CUSTOMISATION OPTIONS



Flush mount installation
Thickness 2 mm



Audio version



Water and dust protection rating



Induction loop version available by request



Surface mount installation
Thickness 52 mm



Video version



Impact resistance rating




Marine grade 316 stainless steel


COMPATIBLE SYSTEMS



VIEWING ANGLE



130°



100°

DIMENSIONS

Our bespoke VRM panels are made to order. Therefore we can manufacture them to any size and specification, please contact us to discuss your requirements.

Our VRM bespoke range combines the durability, strength and modularity found in our standard VRM range, but with complete versatility and customisation options available.

Whatever the desire of your customer, we can provide a panel solution that meets their requirements. VRM bespoke allows you to create an entry panel that is custom built to your specifications whatever the size, shape, colour or finish you desire.

Our high precision laser engraving option enables us to complete our bespoke service so you can completely customise your panel with company logos and specific font styles and sizes.

FEATURES (In addition to the benefits of the MTM VR)

Bespoke finishes

Laser engraving

Unmatched video quality

IP65 rated bespoke buttons

Manufactured in the UK

Impact & water resistant

Custom sizes

BESPOKE ENGRAVING

Panels are finished with high precision laser engraving. This can be tailored to any requirement including the addition of company or client logos or any specific font styles and sizes.

Laser engraving provides hard wearing, high contrast text and graphics to an exceptional level of detail.

For a more traditional finish, etched engraving can also be provided. Whilst not achieving the level of detail provided by laser engraving, for clients requiring a more classic look, or a particular colour of text, this option can be used.



Your company name engraved here

Your company logo engraved here

Individually label each call button



BESPOKE BUTTONS

To complement your entry panel there are a vast array of push button styles.

Various illumination colours as well as brass, black, bronze and polished finishes are all available to suit any requirement. In addition, a range of DDA buttons with braille and tactile markings can also be included in any panel design.

With the use of LED's we can offer a whole host of lighting colours for the illumination of your buttons.



UNIQUE FINISHES

As well as the standard brushed stainless steel, satin black, highly polished and classic brass options available throughout the range, entry panels can be finished to suit the most exacting requirements. From high resistant powder coating in a vast range of RAL finishes to antique bronze and metal effect coatings, anything is possible.

The range of finishes is vast so please call us with your most specific requirements.



9000+ RAL COLOUR OPTIONS AVAILABLE

LHS

RESIDENTIAL ENTRY PANELS



COMPATIBLE SYSTEMS



LHS is the ideal video entry panel for single homes or small apartment blocks, using the X1 system, with the option of 1 to 4 call buttons.

This product has been developed with particular attention to durability, vandal resistance and reliability, with an all-metal structure and new electronic functionality.



Flush mount installation

Thickness 13 mm



Surface mount installation

Thickness 64 mm



Audio only version



Video version




Water and dust protection rating



Impact resistance rating

VIEWING ANGLE

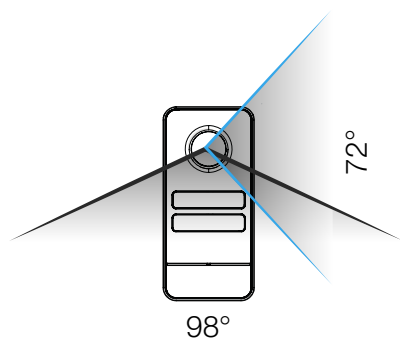

FEATURES

Vandal resistant Zamak casing

Unique design for single homes or small apartment blocks

Available with 1 to 4 call buttons


PLUS version contains Bluetooth technology for use with smartphone App and RFID module for key fob access control

Wide angle camera on video version

Modern LED indicators delicately demonstrate the system status

Easily configured via smartphone

DIMENSIONS

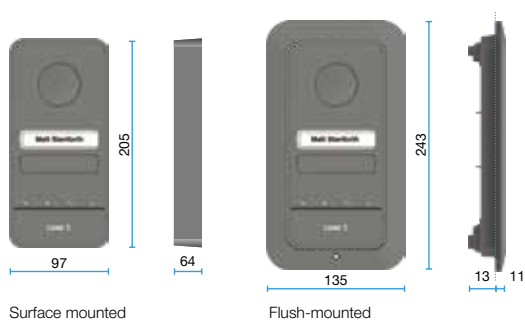



VIDEO



AUDIO

LHS V/01 PLUS

- Main die-cast Zamak body
- Wide-angle camera
98° 728 x 560 px
- 125 kHz RFID sensor for management of up to 40 users
- Bluetooth® module for control via smartphone

LHS V/01

- Main die-cast Zamak body
- Wide-angle camera
98° 728 x 560 px

LHS A/01

- Main die-cast Zamak body
- Microphone



ACCESS CONTROL VIA RFID

LHS Plus is fitted with an integrated RFID reader. By placing an RFID-enabled key fob on the reader, users can open an electric lock, activate an automation or control auxiliary relays.

ACCESS CONTROL VIA BLUETOOTH

LHS Plus incorporates a Bluetooth® module for connecting to your smartphone or tablet using the Automation BT App, enabling easy remote access.

By setting the automatic opening function, it is possible for the app to open the electric lock or activate the automation as soon as the user approaches the door entry system, without having to touch the smartphone (Apple smartphones only).

LHS can accommodate up to 40 different users, meaning you get a 'mini' access control system exclusively inside your door entry panel at no extra cost.

**UP TO
40
USERS**



AUTOMATION BT APP

App available on Google Play and App store for remote management.

XVP

STATE OF THE ART 7" TOUCHSCREEN ENTRY PANEL



COMPATIBLE SYSTEMS



XVP is a touch screen video door entry panel with 7" display, ideal for large prestigious developments with IP360 systems.

The 1.3 Mpx camera has a very wide view angle, 130° horizontal and 95° vertical, with a circular LED system that provides excellent illumination of the person and acts as a courtesy light.

The anti-reflective glass screen is equipped with OPTICAL BONDING technology for perfect viewing in all light conditions and increased scratch and impact resistance.

The entire surface is coated with 5 mm thick tempered glass that provides an IK08 protection rating against shocks and damage.



Flush mount installation

Thickness 15 mm



Surface mount installation

Thickness 50 mm



Video version



Induction loop version available by request



Water and dust protection rating


IP55



Impact resistance rating

IK08

VIEWING ANGLE

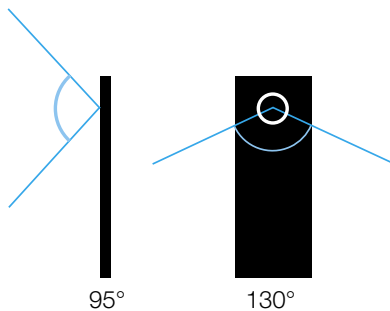

95°

130°

DIMENSIONS



FEATURES

Full touch screen 7" display with Optical Bonding technology

Display brightness 800 Nits

1.3 Mpx Camera

Tempered glass thickness 5 mm

IK08 shock protection rating

Water and dust protection IP55

Resistance to temperatures between -40°C and + 50°C

Aluminium profiles corrosion resistance with 20 micron deep anodising

RTSP protocol to allow 24/7 video streaming

Access control via RFID reader (also from third parties)

Access control via Bluetooth with smartphone app


Graphical interface customisation

Universal proximity reader mount



PERFORMING MATERIALS

XVP is made entirely of aluminium, tempered glass and stainless steel to increase durability & enhance its long-lasting lifespan. A 5mm tempered glass covers the entire surface area of the panel, offering impact resistance and protection from ultra-violet rays.

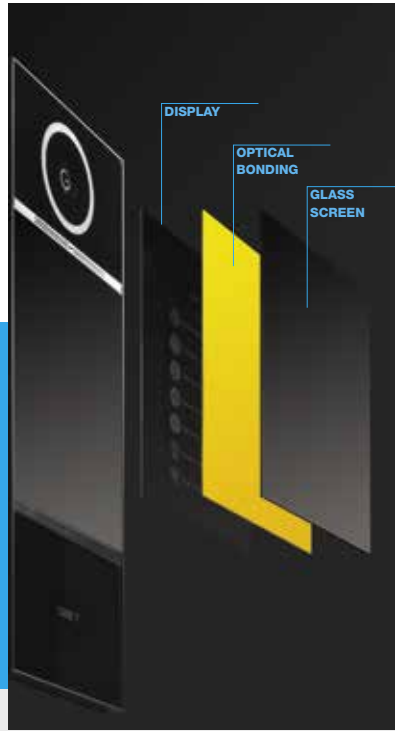

BRIGHT AND CLEAR




Clear visibility under any lighting condition, XVP is equipped with a 7" capacitive touch-screen display. It boasts an exceptional brightness of 800 nits (more than double the amount of any other panel on the market).



ACCESS CONTROL

XVP allows approved entry into secure properties via personal authorisation or by calling the desired extension. Customisation and compatibility with third party add-ons have been the driving force in the development of XVP.

FULLY CUSTOMISABLE USER INTERFACE, ADDRESS BOOK AND CALL LIST

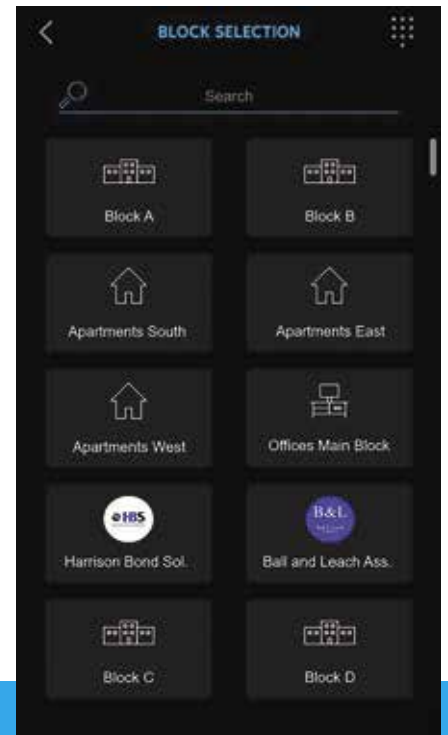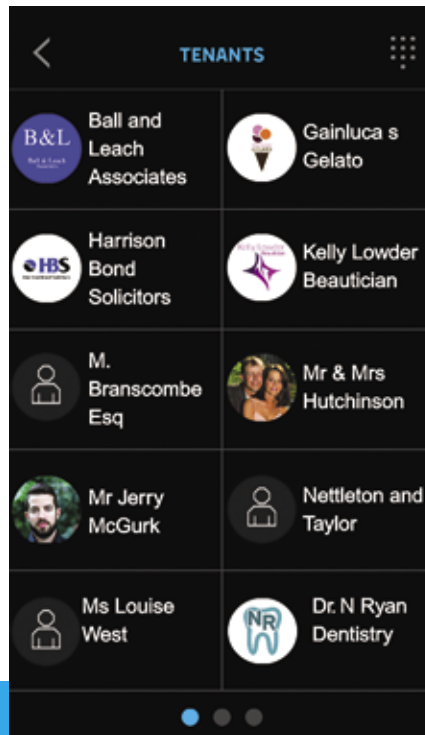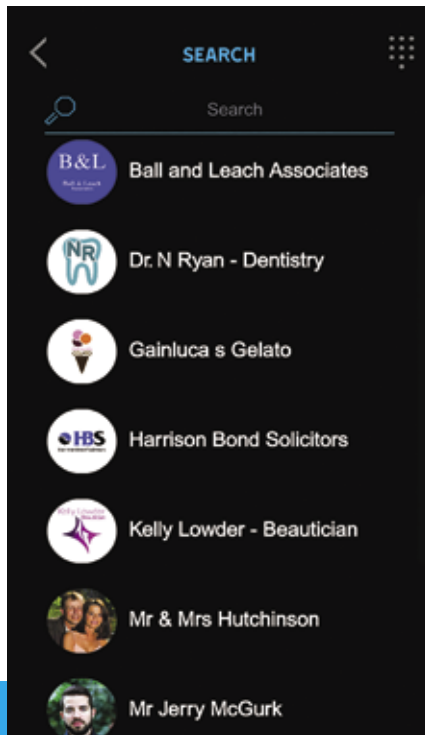




CERTIFIED RESISTANCE FOR ULTRA DURABILITY

Combining elegance and sophistication and developed to be reliable and durable, XVP is the first high end entry panel introduced to the market with a full tempered glass surface.

During the research and development process, XVP has undergone a series of rigorous tests in CAME's testing facility, completing recognised certification to guarantee high levels of safety and reliability.

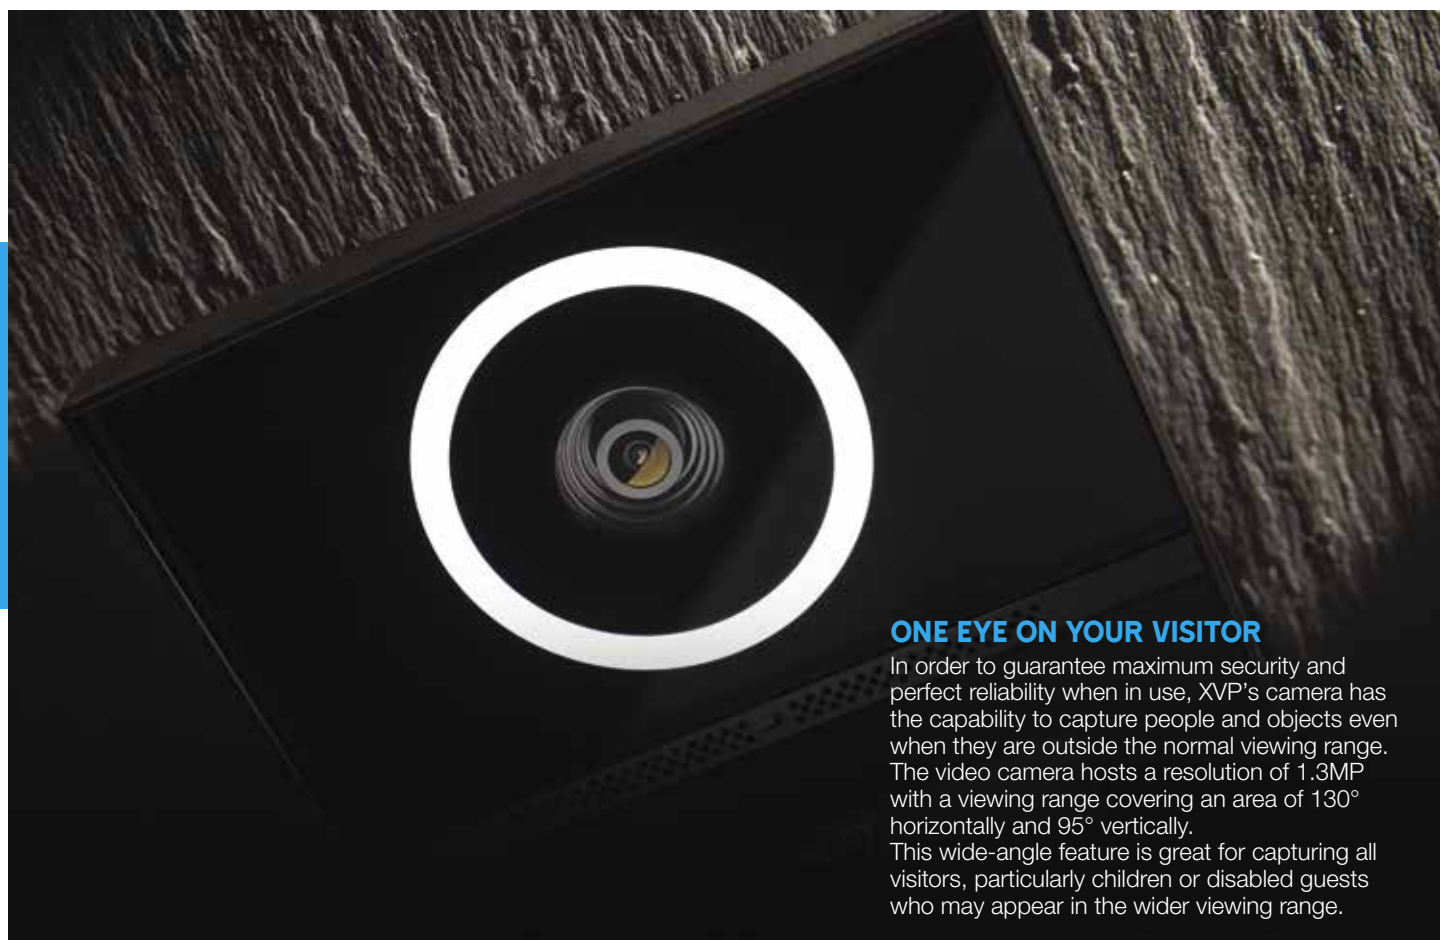

ONE EYE ON YOUR VISITOR


In order to guarantee maximum security and perfect reliability when in use, XVP's camera has the capability to capture people and objects even when they are outside the normal viewing range. The video camera hosts a resolution of 1.3MP with a viewing range covering an area of 130° horizontally and 95° vertically. This wide-angle feature is great for capturing all visitors, particularly children or disabled guests who may appear in the wider viewing range.

SECURITY AND CONTROL

XVP boasts a wide angled lens which allows objects to be captured within 1 metre even when they are outside the normal viewing range.

Operating as a video surveillance device, it can record 24 hours a day, 7 days a week. With RTSP protocol, it is now possible to view the images in multimedia streaming, as well as being able to record them through third-party VMS management software.

Video stream and event management functions are standard thanks to the integration of the ONVIF protocol.

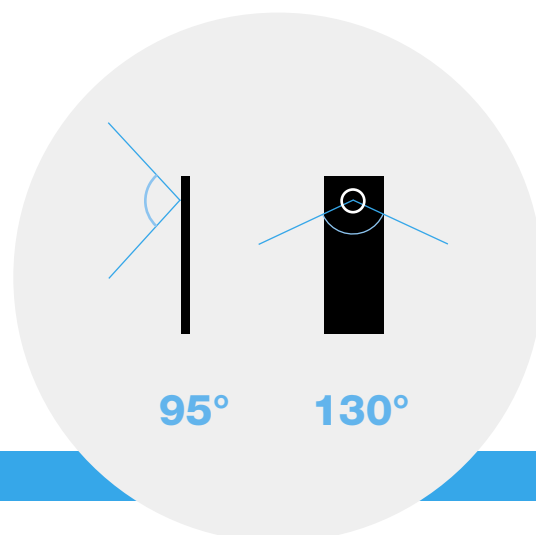

XVP HDP POST




MANUFACTURED IN THE UK FROM STAINLESS STEEL

Our XVP HDP mounting post is designed specifically to house a flush mounted XVP door entry panel

It comes in a standard 1400mm high post size, powder coated with RAL 9005 black.

HDP/XVP

Standard 1400mm high post, powder coated with RAL 9005 finish.

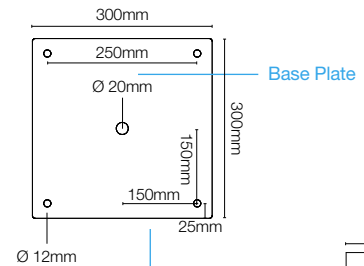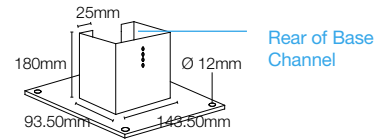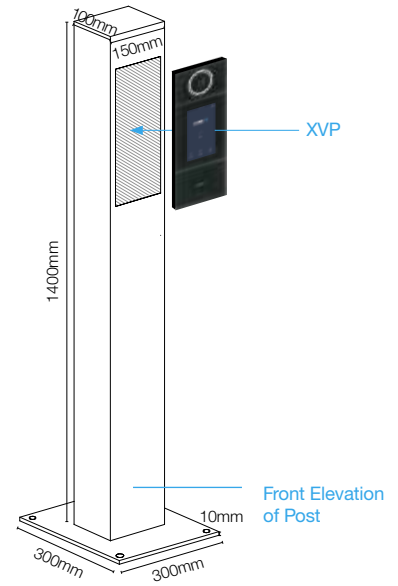


The base plate and post are separate with adjustable height options to allow for different floor finishes (if base plate is concealed)

Two access panels in the back of the post allow easy installation and cable connection points.

Cable Access Plate

Rear Elevation of Post

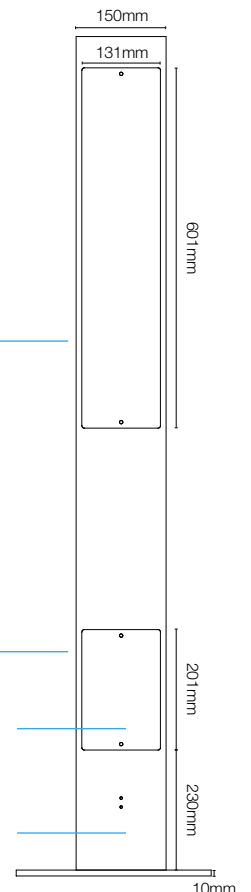

VRM HDP POSTS

MANUFACTURED IN THE UK FROM STAINLESS STEEL

Our HDP range of brushed stainless steel mounting posts consists of 2 standard sizes - 1400 and 1800 mm. Modular flexibility of VRM/VRW allows you to incorporate the complete range of systems and modules based on your requirements.

The removable face plate allows for up to five modules as standard to cover almost any combination and is made to order.

Bespoke posts can be manufactured to help achieve your perfect design.




VRMPOST1400

Standard 1400mm high, brushed steel finish post, fitted with a size 5 panel.



VRMPOST1800

Standard 1800mm high, brushed steel finish post, fitted with a size 5 panel.

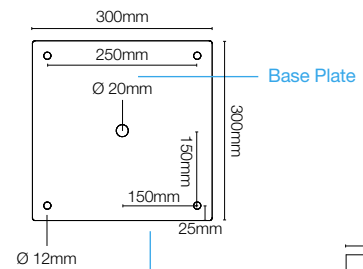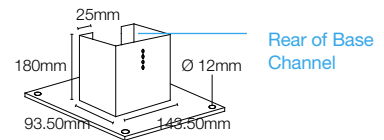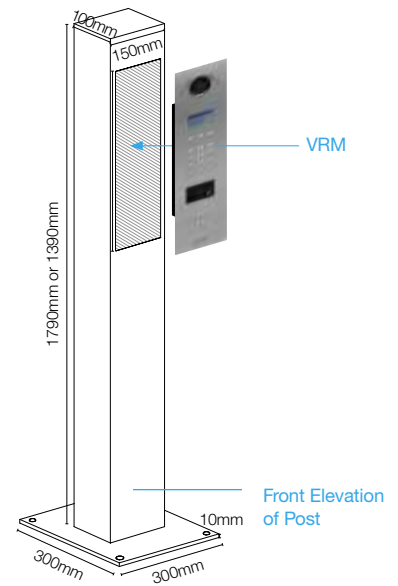


The base plate and post are separate with adjustable height options to allow for different floor finishes (if base plate is concealed)

Two access panels in the back of the post allow easy installation and cable connection points.

Cable Access Plate

Rear Elevation of Post

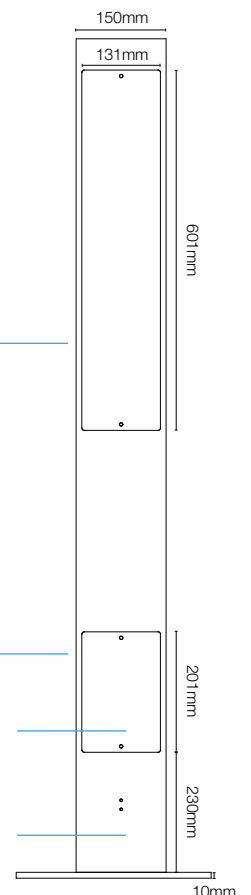

A WORLD OF COLOUR

CHOOSE A CUSTOM RAL FINISH TO ENHANCE YOUR DESIGN



UNIQUE FINISHES

As well as the four example colours shown, on our VRM HDP Range we can create a bespoke option, finished to suit the most exacting requirements. From high resistant powder coating in a vast range of RAL finishes to antique bronze and metal effect coatings, anything is possible. The range of finishes is vast so please call us with your most specific requirements.

OVER
9000
RAL COLOUR
OPTIONS
AVAILABLE



MOUNTING POSTS

MANUFACTURED IN THE UK FROM STAINLESS STEEL

For free standing panels at either pedestrian or vehicle entrances, a range of mounting posts are available. All posts are manufactured with a brushed steel finish, but can be coated to match most finishes.

A range of posts are held in stock and are available next day. For more bespoke solutions, integrated entry panels and mounting posts can be designed to meet your requirements.

The extensive variety of mounting posts are designed to complement the CAME entry ranges. The posts are all constructed in the UK from stainless steel and have consistently proven to be a hard wearing and stylish option for vehicle entrances, or where placing an entry panel to a wall or building is not practical.

As well as a standard range of posts for vehicle, DDA, pedestrian and HGV applications, custom posts can be manufactured for architectural requirements. It is also possible to powder coat any post to an applicable RAL finish to perfectly match the entry panel.



POST/1700


1700mm box section mounting post for standard size 1-4 entry panels. Particularly suited to pedestrian applications to ensure the correct mounting height (surface housing required).



POST/1400

1400mm box section mounting post for standard size 1-4 entry panels. Particularly suited to the X1 DDA range of entry panels to ensure correct mounting height (surface housing required).



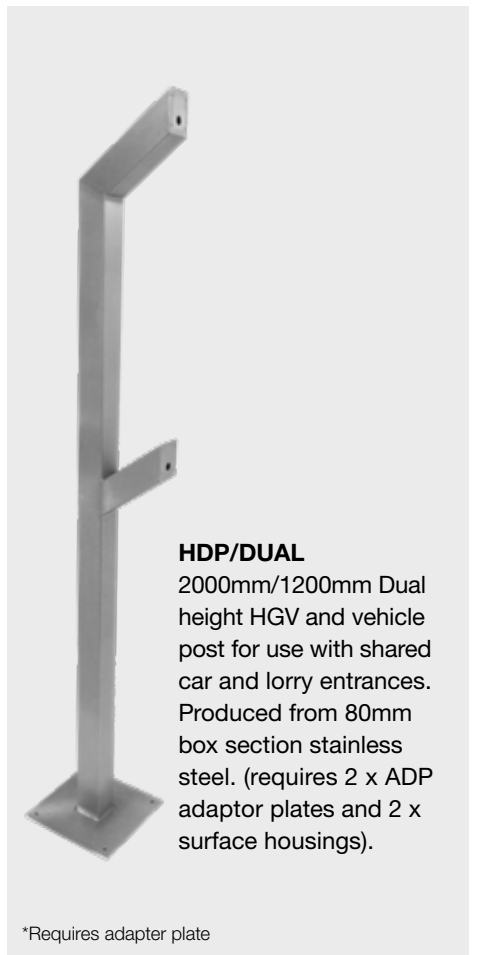


**BESPOKE POSTS
MANUFACTURED
IN THE UK**

HAVE A SPECIAL REQUIREMENT? WE MANUFACTURE POSTS IN A RANGE OF SHAPES & SIZES TO MEET YOUR REQUIREMENTS.

**CALL OUR SALES TEAM FOR FURTHER INFORMATION ON
01442 230 800**

**ADAPTER PLATES - WHEN USING HDP 1200, HDP 2000, HDP DUAL & TP1200 POSTS, A SUITABLE ADAPTER PLATE WILL BE REQUIRED
PLEASE CONFIRM YOUR PANEL SIZE BEFORE ORDERING**

Panel Size	Description	Size (mm) (w x h x d)	Code
1	Flat plate panel adaptor for use with VRM and VRW entry panels in brushed stainless steel finish. Requires VRMSH Surface mount (sold separately)	130x136x2mm	VRMADP/1
2	Flat plate panel adaptor for use with VRM and VRW entry panels in brushed stainless steel finish. Requires VRMSH Surface mount (sold separately)	130x216x2mm	VRMADP/2
3	Flat plate panel adaptor for use with VRM and VRW entry panels in brushed stainless steel finish. Requires VRMSH Surface mount (sold separately)	130x316x2mm	VRMADP/3
4	Flat plate panel adaptor for use with VRM and VRW entry panels in brushed stainless steel finish. Requires VRMSH Surface mount (sold separately)	130x406x2mm	VRMADP/4
1	Cavity plate panel adaptor for use with MTM and MTM VR entry panels in brushed stainless steel finish. Requires MTMSP or MTMVRSP surface mount (sold separately)	130x136x20mm	MTM/ADP/1
2	Cavity plate panel adaptor for use with MTM and MTM VR entry panels in brushed stainless steel finish. Requires MTMSP or MTMVRSP surface mount (sold separately)	130x216x20mm	MTM/ADP/2
3	Cavity plate panel adaptor for use with MTM and MTM VR entry panels in brushed stainless steel finish. Requires MTMSP or MTMVRSP surface mount (sold separately)	130x316x20mm	MTM/ADP/3
4	Cavity plate panel adaptor for use with MTM and MTM VR entry panels in brushed stainless steel finish. Requires MTMSP or MTMVRSP surface mount (sold separately)	130x406x20mm	MTM/ADP/4

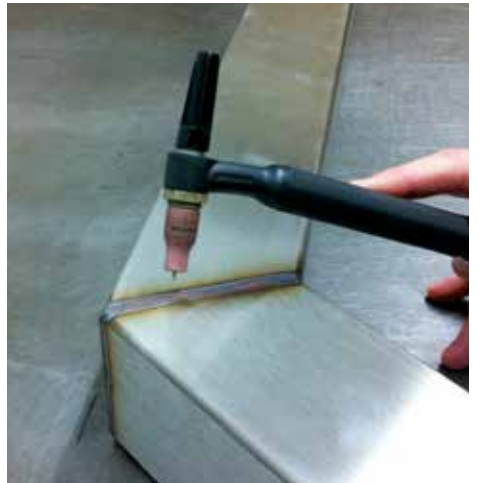

VIDEO MONITORS AND RECEIVERS

XTS

HANDS-FREE VIDEO MONITOR WITH
5" AND 7" TOUCH SCREEN DISPLAY

PLX & PLX WIFI

HANDS-FREE VIDEO MONITORS
WITH 5" LCD DISPLAY

AGT

HANDSET VIDEO MONITOR
WITH 5" LCD DISPLAY



XTS

HANDS-FREE VIDEO MONITOR WITH 5" AND 7" TOUCH SCREEN DISPLAY



COMPATIBLE SYSTEMS



Recessed installation
Thickness 11 mm



Surface mount
Thickness 24 mm



Video version



7" display version



5" display version



Induction loop version available by request



Audio speakerphone

Would you like to have a designer product with state of the art technology inside? XTS is the new range of video monitors, available with 7-inch and 5-inch touch screen monitors from CAME. The minimal design and the material quality enhances its elegance, whether you choose the white or black version. High resolution glass screen with "Optical bonding" technology guarantees perfect viewing in all light conditions. The presence of WiFi, both in the X1 and IP versions, make it the perfect choice for those who want to manage the video door entry system and open the door from their smartphone.

FEATURES

Full-duplex speakerphone sound

Capacitive full touch display with "Optical bonding" anti-reflection technology

Integrated WiFi for remote calling

Intercom calls to other derivatives and mobile devices

Customisable user interface

Auxiliary functions / door call

"Panic" button to request assistance to the concierge

Ringer setting / privacy (with signal LED)

Camera preview of the external stations

Video conferencing and video recording during the conversation

Automatic programmable opening function with time slots

Local power supply or POE

INSTALLATION




Recessed installation




Wall installation

DIMENSIONS

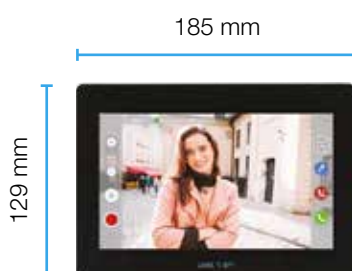

FULLY CUSTOMISE YOUR XTS

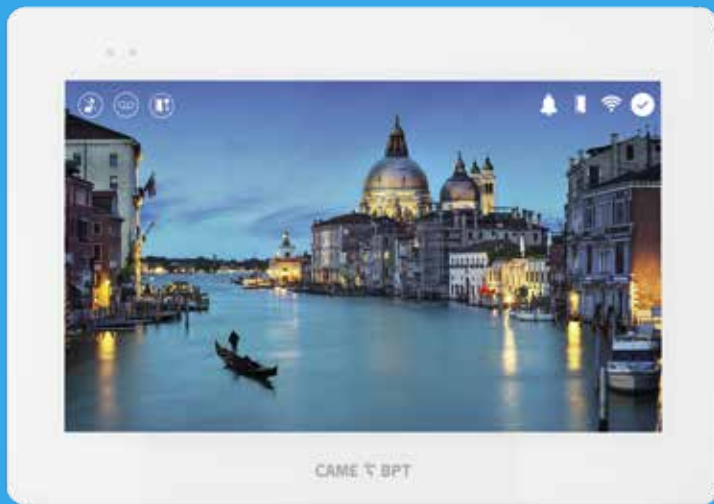


The XTS graphic user interface software will allow the system installer to customise the screen like never before. This unique feature is available on all XTS IP monitors.

Home and operational screens can be personalised with any background image, custom buttons and layout design imaginable. Unused function buttons can be removed to simplify the user experience, background images and custom button graphic sets can be imported to make each installation truly unique.

Function buttons can be assigned to any action and any image can be used as a function. Load in an image of the actual entrance and press that image to activate the camera preview. Change the page order and layout to suit the installation when swiping between screens.

Design schemes can be applied to individual monitors, or a shared scheme can be applied to a whole building incorporating logos or complimentary colour palettes. Give each floor of a building a unique design, offer the penthouse an exclusive interface with additional features, the possibilities are endless with XTS.

Schemes (including function button operations) can be pre-designed and saved to be imported later. Contact details or maintenance company details can be set as the background image in industrial or commercial settings. The only limitation of XTS is your creativity.

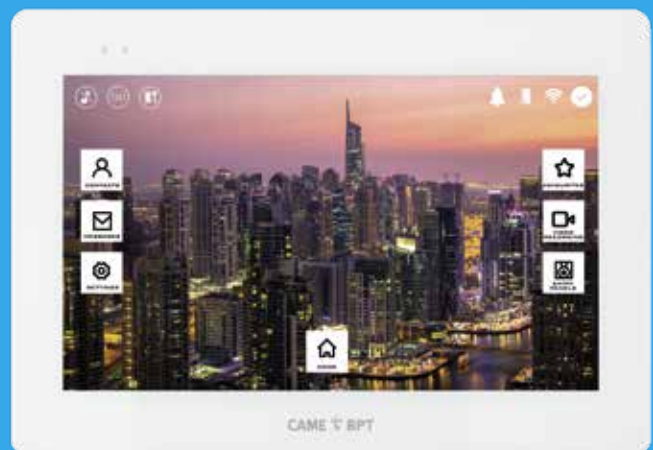

XTS SOFTWARE FEATURES

DISCRETE VIDEO RECORDING DURING A CALL

Want added security and peace of mind? At the touch of the button, XTS can record audio and video from the call in progress.



CCTV INTEGRATION

Own an IP CCTV system and want to access live images easily and conveniently? Integrate them into XTS for full visual security at the touch of a screen.



AUTOMATIC DOOR OPENING


Having a party and don't want to keep having to get up to let everyone in? Activate the auto open feature on XTS and next time the call button is pressed the gates will open automatically (similar operation to a 'trades timer' function).

MISSED CALL NOTIFICATION

Need to know if someone tried to contact you? XTS will provide a missed call log showing the dates and times. Even when the monitor is in standby, an LED will illuminate to alert the user with a missed call notification when the screen is not active.

CHANGE YOUR COLOUR SCHEME

When using the tiled menu structure, different background colour schemes can be selected by the user to easily change the appearance of the XTS interface.



VIDEO VOICEMAIL

Expecting an important delivery and don't want to be disturbed? Simply enable the automated video voicemail and record an outgoing message. You can review your saved audio and video footage of the call later, at your convenience. Video messages are stored to the internal memory of the monitor and streamed directly to your smartphone via a push notification from the Video Entry app, meaning no video footage is stored in the cloud*.

*Patent pending

XTS REMOTE SYSTEM MANAGEMENT USING BUILT-IN WIFI

XTS is equipped with a WiFi card and with a simple configuration can be connected to the internet. In this way you can use the video door entry system remotely via your smartphone or tablet.



ROUTER

The device, equipped with a WiFi card, it can be hooked up to your own home router and take advantage of the home network to connect to the internet.

INTERNET

The internet connection, exploiting the home network, does not imply any additional costs on top of your network provider subscription.

CAME CONNECT

It is the Cloud Technology platform that allows you to remotely manage the system guaranteeing maximum security levels.

SYSTEM X1 APP CONNECTIVITY

The X1 system can support a maximum of 4 simultaneous App connections per call. The XTS X1 7" WiFi monitor is supplied with these 4 App licences included.



IP360/XIP APP CONNECTIVITY

For IP360 or XiP installations using the XTS IP 7", a higher number simultaneous App connections are possible dependent on the system configuration. Additional control equipment may be required.

NOTE

The WiFi function is only available on XTS versions with a 7" display.

PLX

HANDS-FREE VIDEO MONITOR WITH 5" LCD DISPLAY



COMPATIBLE SYSTEMS



Surface mount only
Thickness 21 mm audio
25mm video



Audio only
version



Video version



5" Display



Handsfree

PLX is our range of hands-free audio or audio/video entry receivers with a hi-performance speaker that provides loud ringtone as well as crisp audio. Where video is an option for the system, a 5" colour display creates crystal clear images from the entry panel feed. PLX is an elegant receiver which combines minimalism and functionality. Matt white finish, a sleek streamlined shape, and only 25mm thickness for the video version, 21mm for the audio version.

FEATURES

- Hands free receiver
- Soft touch buttons
- Auxiliary functions / door call
- Latch function
- Camera preview of the external stations
- Ringer setting / privacy (with signal LED)
- Intercom calls
- "Panic" call to request concierge assistance
- Programmable ring tones based on the call
- 8 intercoms on video version - 6 on audio
- 5" display on video version
- Video voicemail
- Alex and Google Home compatibility
- Integrated tele-loop (PLX V BF model only)

AVAILABLE VERSIONS





Audio
version



Video
version

DIMENSIONS

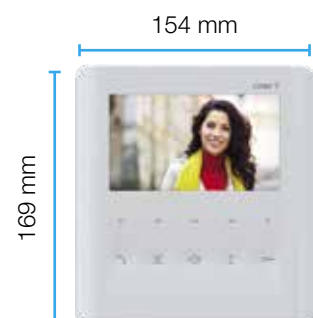

PLX WIFI

HANDSET VIDEO MONITOR WITH 5" LCD DISPLAY

COMPATIBLE SYSTEMS



Surface mount only
Thickness 25mm



Video version



5" Display



Handsfree



PLX WiFi is an evolution of the new PLX range of hands-free audio/video entry receivers, offering all of the features of PLX with the addition of WiFi functionality. Calls can be taken on the CAME VideoEntry App from anywhere in the house. PLX WiFi is powered via the bus or local power supply. The PLX V WIFI BF features an integrated tele loop for the hearing impaired.

AVAILABLE VERSIONS



Video version

DIMENSIONS



FEATURES

- Hands free receiver
- Soft touch buttons
- Auxiliary functions / door call
- Latch function
- Camera preview of the external stations
- Ringer setting / privacy (with signal LED)
- Intercom calls
- "Panic" call to request concierge assistance
- Programmable ring tones based on the call
- 8 intercoms on video version - 6 on audio
- 5" display
- VideoEntry app functions
- 2.4 GHz WiFi
- Video voicemail
- Alex and Google Home compatibility
- Integrated tele-loop (PLX V WIFI BF model only)

PLX FEATURES

INTERACTIVE COLOUR DISPLAY

PLX is the brand new range of hands-free audio/video entry receivers with a high performance speaker that provides clear, crisp audio.

The video version houses a 5" interactive TFT colour display with a 480 x 272 pixel resolution providing crystal clear images from the entry panel feed, along with soft touch controls for brightness, contrast and colour adjustment.

WIFI CONNECTED VERSION


PLX WIFI allows you to answer a video entry call directly from your smartphone while you are on the move.

You can talk to the person who is ringing and you can open the gate or the entrance door even if you are not home. Thanks to a standard WiFi Internet connection, it is possible to pick up the call from every room in the house, from the garden or while you are far away, in the office or even when stuck on the train!



MINIMAL AND THIN

An elegant receiver which blends minimalism and functionality. A discreet matt white finish complements a subtle design, with a depth of only 25mm for the video version, and 21mm for the audio version.

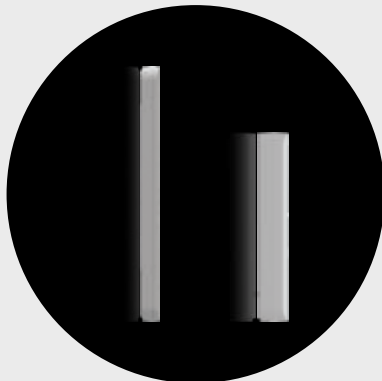

INNOVATIVE DESIGN

The hidden speaker and microphone allow for crystal clear audio and ringtone.



VOLUME ADJUSTMENT

Ringtone management (volume adjustment/mute mode) is easily controlled by the display buttons, whilst subtle LEDs provide a visual indicator.





AUXILIARY OUTPUT

Auxiliary commands can be configured via dip-switch selection. PLX is equipped with AUX2, allowing a porter or reception call. At the same time, up to 5 AUX or 6 intercom calls can be arranged.



LATCH FUNCTION

The latch function allows users to know if their gate or door is open via a LED icon.

This enables the user to latch open the gate or door for a period of time for a specific purpose, before switching it off and resuming normal access control once complete.



DOOR OPENING

In scenarios where you have high volume of entry/exit, for example offices or public places, PLX allows you to engage the automatic door function with no need for additional access control.

This function can easily be switched on/off whenever needed.



SOFT TOUCH BUTTONS

Size and shape are perfectly balanced, colour and finish are stylish and elegant. Extensive work during the design process has been dedicated to creating a refined soft touch solution. White LED visual indicators sit beneath the surface, making the buttons easy to locate in low light settings.

EASY INSTALLATION

Installation of PLX couldn't be easier, with no chasing required prior to surface mounted installation.

It's also compatible with both 503 and 60mm horizontal and vertical back boxes.

The wall mounting frame is the perfect solution for replacing old models.



AGT

HANDSET VIDEO MONITOR WITH 5" LCD DISPLAY



COMPATIBLE SYSTEMS



Surface mount only
Thickness 31 mm



Audio only version



Video version



5" Display

AGT is our range of handset video intercoms. Ergonomically designed with a matt white finish, AGT is only 21mm deep, with a 5" colour screen and rich functionality. Illuminated soft touch buttons make AGT a pleasure to use. AGT comes in a number of versions and can include induction loop technology for the hard of hearing. There are settings available to change the colour, brightness and ringtone volume that are intuitive and easy use.

FEATURES

- Handset receiver
- Auxiliary functions / door call
- Camera preview of the external stations
- Ringer setting / privacy (with signal LED)
- Intercom calls
- "Panic" call to request concierge assistance
- Programmable ring tones based on the call

AVAILABLE VERSIONS



Audio version



Video version

DIMENSIONS





MINIMAL AND THIN

An ergonomically designed receiver which combines minimalism and functionality. Matt white finish and a sleek, streamlined shape for only 21 mm thickness.



MAGNETIC SWITCH

Developed with precision and style, AGT has been designed to effortlessly blend into its surroundings, and magnets have been integrated into the handset and receiver to make the use of the device as easy as possible.



VOLUME ADJUSTMENT

Ringtones management (volume adjustment/mute mode) can be easily controlled by the display buttons, whilst an LED indicator provides a visual indicator. For audio 200 version, the volume control is managed through a hidden lever.

AUXILIARY OUTPUT



LATCH FUNCTION



AUTOMATIC DOOR OPENING



EASY INSTALLATION









Supplied surface mounted, installation of AGT couldn't be easier, with no tracing work required prior to installation.

The wall mounting frame is the perfect solution also to replace old models. Once the wall bracket has been fixed, the receiver is quickly settled thanks to the easy plug-in system.











AGT can be supplied with an additional table mounting device to further the flexibility of use.



ENTRY PANELS PRODUCT GUIDE

		MODULAR			RESIDENTIAL	PREMIUM
DESCRIPTION						
		MTM	MTM VR	VRM/VRW	LHS	XVP
INSTALLATION	Wall (L x H x D) (mm)	All panels are modular or custom made, so sizes will vary.	All panels are modular or custom made, so sizes will vary.	All panels are modular or custom made, so sizes will vary.	92 x 205 x 23	153 x 406 x 50
	Wall with rain cover (L x H x D) (mm)				-	-
	Recessed (L x H x D) (mm)				135 x 243 x 42	153 x 406 x 15
	Recessed with rain cover (L x H x D) (mm)				-	-
SYSTEM						
FEATURES	Push-button call	✓	✓	✓	✓	✓ (Touch screen)
	Digital call	✓	✓	✓	-	✓
	Graphic Display	✓	✓	✓	-	✓ (Customisable)
	Backlighting keys	WHITE & BLUE LEDS	WHITE & BLUE LEDS	WHITE & BLUE LEDS	WHITE LEDS	-
	Degree of protection (IP)	IP54	IP54	IP65 Equivalent	IP54	IP55
	Degree of impact resistance (IK)	IK07	IK09	IK09	IK09	IK08
	Electric lock output (12 V)	✓	✓	✓	✓	✓
	Relay with configurable activation	✓ (excluding Audio Lite)	✓ (excluding Audio Lite)	✓ (excluding Audio Lite)	✓	✓
	Adjusting audio volumes	✓	✓	✓	✓	✓
	Connection, control and timing adjustment of the electric lock	✓	✓	✓	✓	✓
	Access control	✓	✓	✓	✓ (PLUS VERSION)	✓
	Visual signals for the disabled	✓ (excluding Audio Lite)	✓ (excluding Audio Lite)	✓ (excluding Audio Lite)	✓	✓
	Speech synthesis of messages	✓ (excluding Audio Lite)	✓ (excluding Audio Lite)	✓ (excluding Audio Lite)	-	✓
Use without server (Serverless)	✓ (only version IP360)	✓ (only version IP360)	✓ (only version IP360)	✓	✓	

AUDIO & VIDEO RECEIVERS PRODUCT GUIDE

	AUDIO RECEIVERS		VIDEO RECEIVERS			DESCRIPTION
						
	AGT AUDIO	PLX AUDIO	AGT VIDEO	PLX VIDEO	XTS	
	Audio handset	Audio hands-free	Video handset with 5" LCD display	Hands-free video receiver with 5" LCD display	Hands-free video receiver with 5" or 7" touch screen TFT display	
Wall (L x H x D) (mm)	116 x 190 x 31	125 x 125 x 21	205 x 190 x 31	154 x 169 x 25	185 x 129 x 24 (7) 138 x 98 x 24 (5)	INSTALLATION
Recessed (l x h x d) (mm)	-	-	-	-	185 x 129 x 11 (7) 138 x 98 x 11 (5)	
Table-top (accessory code)	AGT KT A 840XC-0140	AGT KT A 840XC-0140	AGT KT V 840XC-0150	AGT KT V 840XC-0150	XTS 7 KT - 840XC-0120 XTS 5 KT - 840XC-0130	
Max current draw	30 mA	80 mA	135 - 175 mA	200 mA	350 - 520 mA	
						
Door Open	✓	✓	✓	✓	✓	COMMANDS
Automatic door opener	-	-	-	-	✓	
Cyclic selection	-	-	✓	✓	✓	
Auxiliary commands (n.)	✓ 1 (with AGT P1 per system 200)	✓ 5	✓ 2	✓ 5	✓ ∞	
Ring tone	✓ (excl System 200)	✓	✓ (excl System200)	✓	✓	
Intercom	✓ 6 (Building 200) 10 (Building X1 e XIP)	✓ 6	✓ 5 (Building 200) 8 (Building X1e XIP)	✓ 8	✓ ∞	FUNCTIONS
Call to the concierge	✓ (with AGT P1 for system 200)	✓	✓	✓	✓	
Mute in conversation	-	-	-	✓	✓	
Ringtone privacy	✓ (AGT building version)	✓	✓	✓	✓	
Audio video secretary	-	-	-	-	✓	
App licenses included	-	-	-	✓ (WiFi version)	4 (XTS 7)	SETTINGS
Ringtone volume adjustment	✓ (AGT building version)	✓	✓	✓	✓	
Brightness adjustment	-	-	✓	✓	✓	
Colour adjustment	-	-	✓	✓	-	

The AGT, PLX and XTS video door entry receivers are also available with a device for interfacing with "T" type magnetic induction devices (for hearing aid users). All video entry units are provided with two wire door bell inputs.

CAME, A GROUP YOU CAN RELY ON

CAME

A LEADING GROUP IN HOME & BUILDING AUTOMATION, WITH A BROAD RANGE OF INTEGRATED TECHNOLOGICAL SOLUTIONS FOR AUTOMATING RESIDENTIAL, PUBLIC AND URBAN SETTINGS.



CAME BPT

AN INTERNATIONALLY RENOWNED BRAND WHEN IT COMES TO PROJECTS INVOLVING TECHNOLOGY FOR VIDEO INTERCOM, TEMPERATURE CONTROL AND SECURITY SYSTEMS.



CAME ÖZAK

A BRAND SPECIALISED IN VEHICLE AND PEDESTRIAN ACCESS CONTROL.



CAME URBACO

AN INTERNATIONALLY LEADING BRAND OF INTEGRATED ACCESS CONTROL SYSTEMS, PERIMETER SECURITY, URBAN PLANNING AND AUTOMATED TRAFFIC-FLOW CONTROL.



CAME PARKARE

A BRAND SPECIALISED IN THE AUTOMATIC PARKING AND PARKING METER SEGMENT, PROVIDING SOLUTIONS THAT MEET MARKET NEEDS AND SUSTAINABLE MOBILITY.



CAME GO

A BRAND SPECIALISED IN DESIGNING AND MANUFACTURING GARAGE DOORS AND SECTIONAL DOORS, FOR RESIDENTIAL AND INDUSTRIAL SETTINGS, FEATURING MANUAL AND AUTOMATED OPERATION SYSTEMS.



CAME KMS

A SPECIALIST SUPPLIER OF ACCESS CONTROL EQUIPMENT FOR THE LOCAL AUTHORITY SECTOR.



CAME ENTROTEC

A MARKET LEADER IN ACCESS CONTROL AND VIDEO DOOR ENTRY SYSTEMS.



CAME 



CAME UK - North

Unit 1B
Sills Road
Willow Farm Business Park
Castle Donington
DE74 2US

Tel: 0115 921 0430

CAME UK - South

Liberta House
Maxted Road
Maylands Ind. Est.
Hemel Hempstead
Herts
HP2 7DX

Tel: 01442 230 800

CAME - Ireland

Unit 9
The Westway Centre
Ballymount
Dublin 12

Tel: +353 (0)1 450 7442



© INTERCOM0324 - 2024 - EN
YOU MAY NOT EVEN PARTIALLY REPRODUCE THIS DOCUMENT
CAME RESERVES THE RIGHT TO MAKE ANY CHANGES TO THIS DOCUMENT AT ANY TIME
THE DATA AND INFORMATION SHOWN IN THIS CATALOGUE ARE SUBJECT TO CHANGE WITHOUT OBLIGATION TO GIVE PRIOR NOTICE BY CAME S.P.A, E&OE



CAME S.p.A.
Came cancelli automatici S.p.A.
is certified for Quality and Environment
UNI EN ISO 9001
UNI EN ISO 14001
BS OHSAS 18001

CAME.COM/UK