


LEGACY READERS

LEGACY RESIDENTIAL ACCESS CONTROL

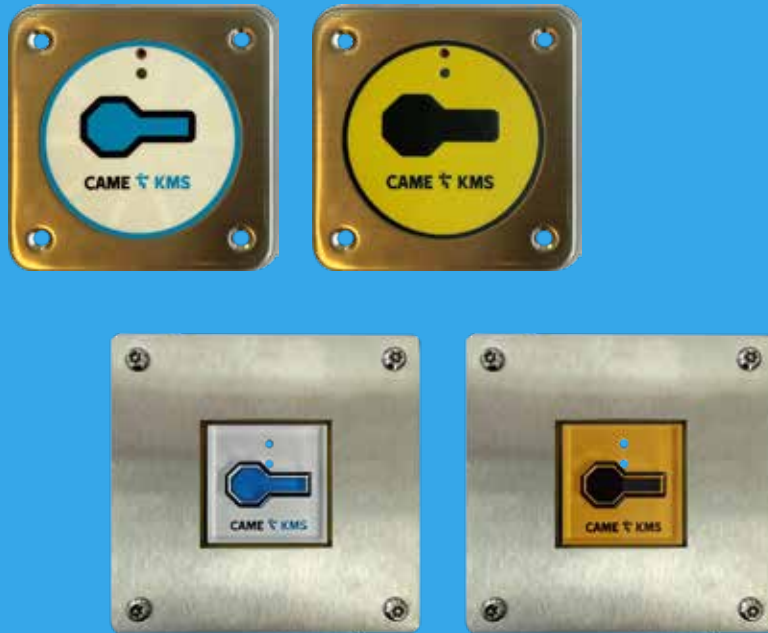

The CAME KMS SimpleKey Legacy readers provide all the benefits of CAME KMS residential access control, for use with legacy fobs and other ID devices..

- **Compatible** with most types of legacy fobs including CAME KMS Sharktooth, PAC, Entrotag etc
- **Panel Mount** reader uses the industry standard 40mm aperture enabling the reader to fit into most new and existing door entry panels.
- **Vandal Resistant** reader employing a robust stainless-steel case and fully potted electronics that can be used in environmentally challenging conditions.
- **Can** be used with both the CAME KMS SimpleKey 3 and SimpleKey 4 systems and also operates with other manufactures access control systems.
- **Dual / tricolour LEDs** indicate the door state, either locked or unlocked, and also when the system voltage drops below 10.5V.
- **Robust** British designed and built readers for UK housing providers and comes with a lifetime guarantee.

INSTALLATION

The **Panel Mount** reader is designed to be mounted within metal panels, no thicker than 2mm with a 40mm square cut-out for the front of the reader to protrude through.

Dimensions: 55mm x 55mm square x 11mm deep.

The **Vandal Resistant** can be fixed to any non-metallic surface using the supplied, vandal resistant screws.

Dimensions: 100mm x 100mm square x 13mm deep.

The **Surface Mount** reader is designed to be fixed directly onto a wall or pedestal.

Dimensions: 100mm x 100mm square x 40mm deep.

Cabling - 6 or 8 core alarm multi strand cable or CW1308 (copper core).

The maximum cable run between the system door controller and the reader is 100 meters.

CAME KMS

1 Marlborough Trading Estate, West Wycombe Road, High Wycombe, Buckinghamshire HP11 2LB
Tel: 01494 531099 Email: ckuk.info@came.com