

ဂုစ၇ မိုလိုဂု ောပ


CAME.COM/ENTROTEC

EPRO HIGH SECURITY READER



INSTALLATION GUIDE

epro HSR INSTALLATION

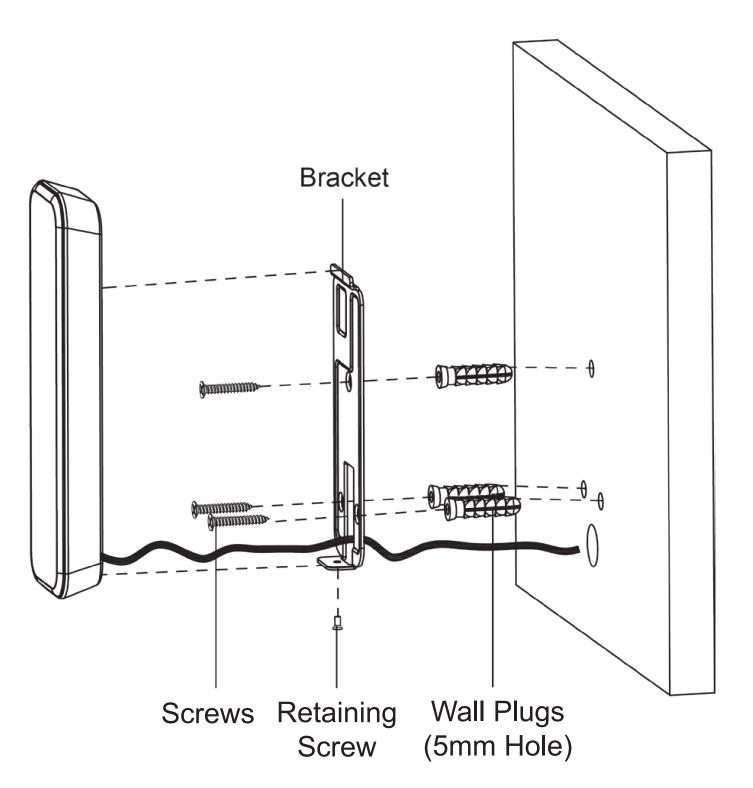

CAME [†] ENTROTEC

epro HSR INSTALLATION



ACCESS CONTROLLER CONNECTIONS

Colour	Port	Description
Red	RD +	12V DC - power input
Black	RD –	0V
Blue	CASE	Tamper alarm output
White	D1	Wiegand outputs (when using Wiegand protocol)
Green	D0	
Brown	LED	LED control input (when using Wiegand protocol)
Yellow	RS-485_B	RS485 (when using RS485 protocol)
Purple	RS-485_A	

CAME T ENTROTEC

CAME ENTROTEC

5 Ashwood Court Oakbank Livingston EH53 0TL

Tel: 01506 886230 Support: 01506 886235

CE

© 2023 - EN - HSRINS0723 YOU MAY NOT EVEN PARTIALLY REPRODUCE THIS DOCUMENT CAME RESERVES THE RIGHT TO MAKE ANY CHANGES TO THIS DOCUMENT AT ANY TIME THE DATA AND INFORMATION SHOWN IN THIS CATALOGUE ARE SUBJECT TO CHANGE WITHOUT OBLIGATION TO GIVE PRIOR NOTICE BY CAME S.P.A, E&OE



CAME S.p.A. Came cancelli automatici S.p.A. is certified for Quality and Environment UNI EN ISO 9001 UNI EN ISO 14001 BS OHSAS 18001

CAME.COM/ENTROTEC