

MULLION READER

FOR INTERNAL AND EXTERNAL USE



Features


Surface mounted Mullion reader for internal and external use. Designed to be mounted directly onto a wall, pedestal or other flat surface, compatible with metallic surfaces i.e stainless steel, lift car interiors or gate posts.

- Fully potted construction for robustness
- Protections: short circuit, SIG wire to 0v, SIG wire to 12v
- DC voltage input detection, LED flashes at <9.5v and >14v
- Compatible with:
 - CAME KMS LF Sharktooth
 - CAME KMS Dual
 - PAC LF
 - PAXTON fobs
- Low profile, smooth edged design
- Large and clear LED indicator
- Reads 125khz and 153khz frequency tokens
- 5 years warranty

TECHNICAL INFORMATION

- IP56 Plastic enclosure.
- Material: ABS Plastic
- Colour: Black with Cyan CAME KMS Logo
- LEDs: Blue = idle, Green = Access Authorised
Red = Access Denied
- Voltage: 9-18v DC
- Power consumption: 190ma peak, 120ma typical
- Compatible Token frequencies: 125khz and 153khz
- Data Output: SIG data, 26bit or 32bit Weigand
- Wiring configuration: Pig tail 300mm lead.
- Cabling: 8 cores
 - Red - 12v
 - Black - 0v
 - Blue - SIG
 - Yellow - LED Control
 - Brown - Sounder
 - Green - Weigand Data 1
 - White - Weigand Data 0
 - Orange - Weigand format selector
- Operating temperatures: -20c to +70c

DIMENSIONS

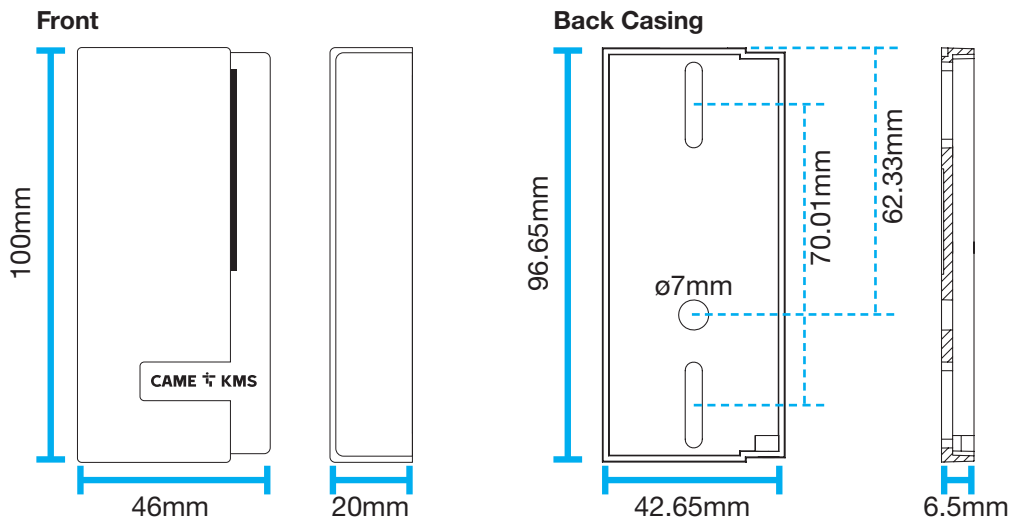

460041023

CAME KMS

1 Marlborough Trading Estate, West Wycombe Road, High Wycombe, Buckinghamshire HP11 2LB
Tel: 01494 531099 Email: ckuk.info@came.com

CAME KMS